




SwitchAir 1U Network Switch Cooling

Effective cool air delivery for rear rack mounted 1U switches with side air intake.

Installation Precaution:

- Install SwitchAir such that the required airflow for safe operation of equipment is not compromised.
- Take precaution to avoid interference with the switch input power cords when installing on a live unit.

SwitchAir 1U Installed in Rack

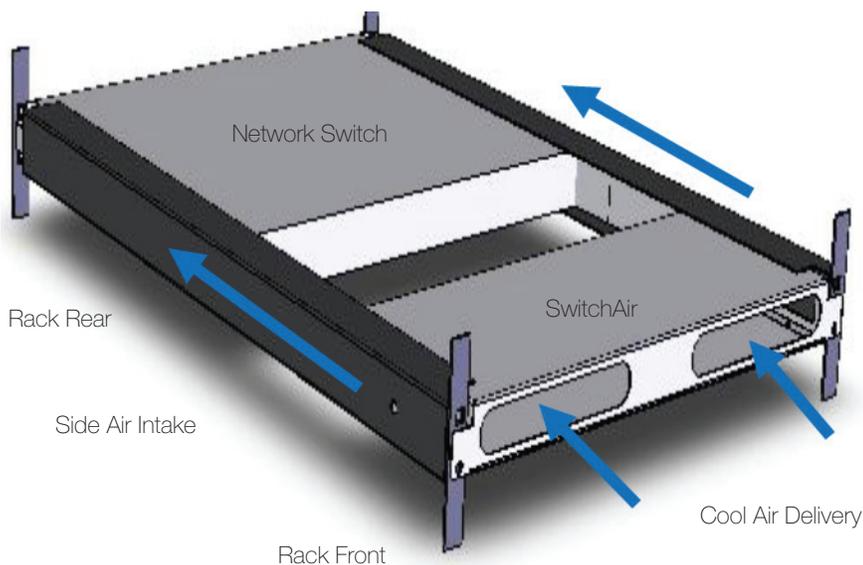

Installs in minutes while network switch is live.

Why Choose Opengate?

- Stabilize your switch intake air temperature to within a few degrees of the rack front intake air temperature
- Installs in minutes and works with most side and rear intake network switches
- SwitchAir 2U can be installed while network switch is operational
- Single input cord runs on any voltage and continually delivers required air
- Opengate by Geist allows rapid return on investment—typically less than three months

SA1-01001NB Specification

Rail Depth Range
27-5/8" to 29 5/8"

Chassis Depth
7"

Channel Length
27 5/8"

Airflow
Switch Generated (passive)


Switch Intake
Side

Warranty
Lifetime





Installing SwitchAir

STEP 1 Before installing SwitchAir, Velcro tie the network switch power cords to power supply handle toward the center of the switch. Place cage nuts in channel mounting holes. Attach Channel to inside of front rail using a single screw at the top cage nut position (rack rail cage nuts and screws not included).

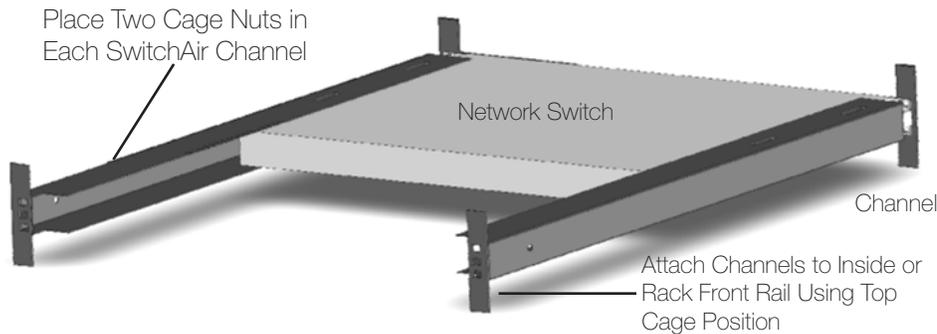

STEP 2 Before installing SwitchAir; remove the lower network switch mounting screw from each side of the rack front rails. Save these screws to be used in the next step for mounting SwitchAir. The network switch upper screw will remain fastened. Attach Channels to Inside of Rack Front Rail Using Top Cage Position.

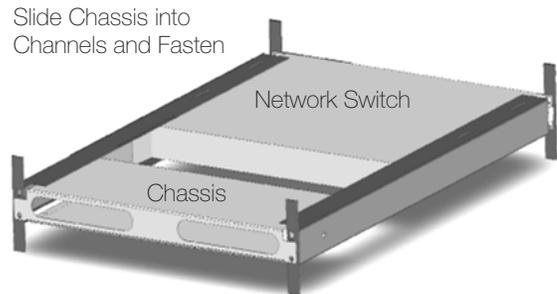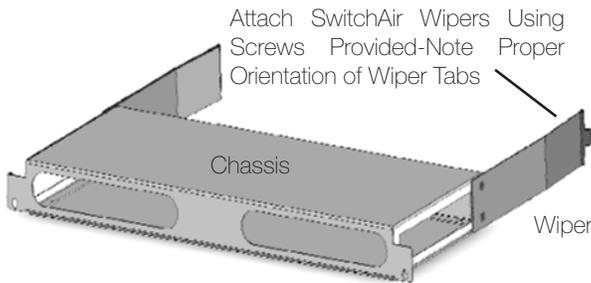

STEP 3 SwitchAir is in a fully extended position when shipped from the factory. Insert SwitchAir into the open rack space at the same U height as the switch. As SwitchAir is pushed into the space, the SwitchAir Rail Tabs will engage the network switch rails for support during installation. Keep pushing the SwitchAir into the space until the SwitchAir front mounting flanges are flush with the rack front rails. Reinstall the screws that were removed previously. Installation is now complete.

STEP 4 Slide the SwitchAir Chassis into the SwitchAir Channels from the front of the rack. Attach the SwitchAir Chassis using two screws (not included).



10001101

Geist Americas

800.432.3219
geistglobal.com

Geist DCIM
1.877.449.4150
geistglobal.com

Geist Europe

+44 (0) 1823 275100
geistglobal.com

Geist Asia

China
+86.755.86639505
geistglobal.com

Hong Kong
+852 90361927
geistglobal.com