



PATENT PENDING

Opengate Installation Guide

SwitchAir 9U Network Switch Cooling®

Effective hot air deflection for Cisco 6509 and Nexus 7018 multi-slot switches mounted in two post frames.

Placing core network switches in adjacent rack frames is a common occurrence, however the side-to-side airflow of these types of switches allow the hot exhaust of one switch to be directed to the intake of the switch in the adjacent rack frame.

SwitchAir 9U directs switch hot exhaust air toward the rear of the switch and away from the side air intake of the adjacent switch. Use one SA9 for the Cisco 6509 and stack two SA9s consecutively for the Cisco Nexus 7018 switch.


Why Choose Opengate?

- SwitchAir 9U can be installed while network switch is operational
- SwitchAir 9U ensures the core switch is able to exhaust the hot air away from the intake of the adjacent switch.

SA1 Specification

Item Number	SA1-09001
Two Post Frame Mounting	Uses 9U of Vertical Height
Unit Height	15.75"
Unit Width	4.625
Unit Depth	15"
Airflow	Exhaust Airflow Director
Warranty	Lifetime

SwitchAir 9U Installed in Rack

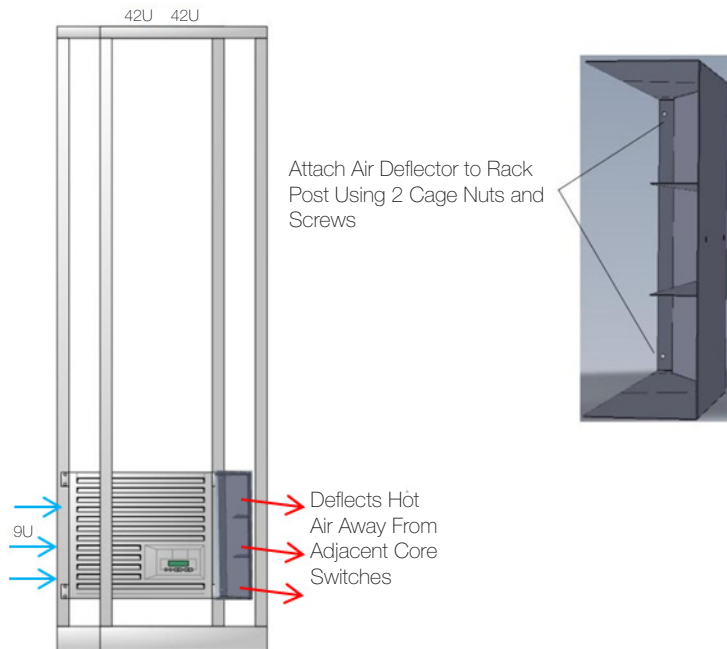

10002101

Geist Americas

800.432.3219
geistglobal.com

Geist DCIM
1.877.449.4150
geistglobal.com

Geist Europe

+44 (0) 1823 275100
geistglobal.com

Geist Asia

China
+86.755.86639505
geistglobal.com

Hong Kong
+852 90361927
geistglobal.com