

# SwitchAir 2U Network Switch Cooling


Effective cool air delivery for front of rack mounted multi RU switches Universal for side intake switch types

Placing core network switches in an enclosed rack is a preferred design but it can be a challenge to deal with the heat generated by the devices. Due to design constraints and equipment density, intake air is typically at the sides of the switch chassis with heat exhaust out the rear or opposite side of the switch.

SwitchAir 2U ensures side intake switches are able to receive the required cool air from outside the rack. SwitchAir delivers air to the switch via the SwitchAir cold air curtain. SwitchAir 2U works with switches having side intake with multiple exhaust configurations.

## SwitchAir 2U

A Single SwitchAir Cools Switches with side air intake vents.

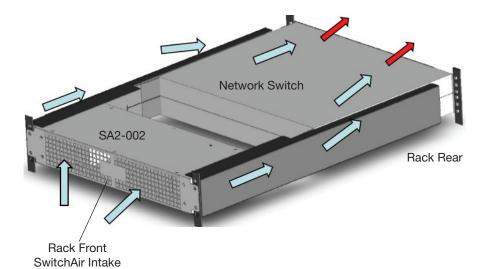



SA2-002 Specification
Rail Depth 26 5/8" to 29 5/8"
Chassis Depth 9"
Channel Depth 26"
Input Power / Indicator 90-264 VAC 50/60 Hz 15 watts LED Power Indicator
Input Connector C14 Input
Airflow 94 CFM
Switch Intake/Exhaust Dual Side/Rear
Safety / Approvals UL, cUL 60950, CE, FCC Class A
Warranty 2 Years

To match your network switches to the relevant Geist Cool SwitchAir product take a look at our compatibility chart at geistglobal.com

10002201

#### **Geist Americas**

800.432.3219 geistglobal.com

#### Geist DCIM 1.877.449.4150 geistglobal.com

### Geist Europe

+44 (0) 1823 275100 geistglobal.com Geist Asia

China +86.755.86639505 geistglobal.com Hong Kong +852 90361927 geistglobal.com