




PATENT PENDING

## SwitchAir 2U Network Switch Cooling

Effective cool air delivery for front of rack mounted multi RU switches universal for side intake switch types

Placing core network switches in an enclosed rack is a preferred design but it can be a challenge to deal with the heat generated by the devices. Due to design constraints and equipment density, intake air is typically at the sides of the switch chassis with heat exhaust out the rear or opposite side of the switch.

SwitchAir 2U ensures side intake switches are able to receive the required cool air from outside the rack. SwitchAir delivers air to the switch via the SwitchAir cold air curtain. SwitchAir 2U works with switches having side intake with multiple exhaust configurations.

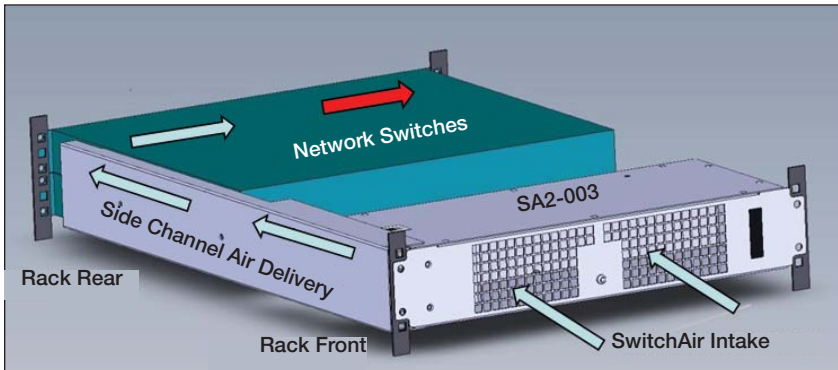

SA2-003 Specification	
Rail Depth	26 5/8" to 29 5/8"
Chassis Depth	9"
Channel Depth	26"
Input Power / Indicator	90-264 VAC 50/60 Hz 15 watts LED Power Indicator
Input Connector	C14 Input
Input Cord	Order separately
Airflow	47 CFM
Switch Intake/Exhaust	Side/Side
Safety / Approvals	UL, cUL 60950, CE, FCC, Class A
Warranty	2 Years



BY GEIST  
10002402

### Geist Americas

800.432.3219  
geistglobal.com

Geist DCIM  
1.877.449.4150  
geistglobal.com

### Geist Europe

+44 (0) 1823 275100  
geisteurope.com

### Geist Asia

China  
+86.755.86639505  
geistglobal.com

Hong Kong  
+852 90361927  
geistglobal.com