

SwitchAir 2U Network Switch Cooling

Effective cool air delivery for front of rack mounted multi RU switches Universal for side intake switch types.

Placing network switches in an enclosed rack is a preferred design but it can be a challenge to deal with the heat generated by the devices. Due to design constraints and equipment density, intake air is typically at the front of the switch chassis with heat exhaust out the rear side of the switch.


SwitchAir 2U ensures side intake switches are able to receive the required cool air from outside the rack. SwitchAir delivers air to the switch via the SwitchAir cold air curtain. SwitchAir 2U works with switches having side intake with multiple exhaust configurations.





SwitchAir 2U

A single SwitchAir cools switches with front air intake vents.

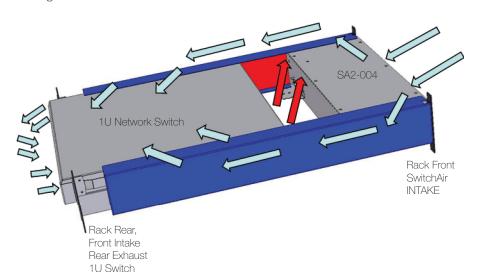

SA2-004 Specification

Input Power / Indicator 90-264 VAC 50/60 Hz 15 watts

LED Power Indicator

Input Connector C14 Input

Airflow 94 CFM

Switch Intake / Exhaust Front / Rear

Safety / Approvals

UL, cUL 60950, CE, FCC, Class A

Warranty 2 Years

Installation

Stackable in consecutive 2U spaces



+44 (0) 1823 275100

Geist Asia

Match your overheating network switch to Geist's ideal solution:

Manufacturer	Model
Alcatel	6900 Omniswitch
Arista	7148sx
Brocade FCX	624, 648, 624-E, 648-E
Brocade NI-CER	202C-AC
Cisco	3064 ask cust airflow, 3750, 3560x, 3750E-12D, 3750E-12SD, 3750X 24 & 48, EX4550, 4948-S, 4948E, 4948E-BDL, 4948E-E, 4948E-S, ASA5510, ASA5540
Dell	8024 series, 8132, 8132F, 8164, 8164F
F5	F5-1600
HP	DL360 G6
Juniper	SSG550M
NetGear	XSM 7224S
Palo Alto Networks	M100

Network Switch not listed?

Switch Cooling products are available in a wide range of configurations and rack space sizes. Allow Geist to develop the solution for you. Geist can custom manufacture a Switch Cooling device specific to your needs. Contact us at 800-432-3219.