



PATENT PENDING

SwitchAir 2U Network Switch Cooling

Effective cool air delivery for front of rack mounted multi RU switches Universal for side intake switch types.


Placing core network switches in an enclosed rack is a preferred design but it can be a challenge to deal with the heat generated by the devices. Due to design constraints and equipment density, intake air is typically at the sides of the switch chassis with heat exhaust out the rear or opposite side of the switch.

SwitchAir 2U ensures side intake switches are able to receive the required cool air from outside the rack. SwitchAir delivers air to the switch via the SwitchAir cold air curtain. SwitchAir 2U works with switches having side intake with multiple exhaust configurations.



SwitchAir 2U

A Single SwitchAir Cools Switches with side air intake vents.

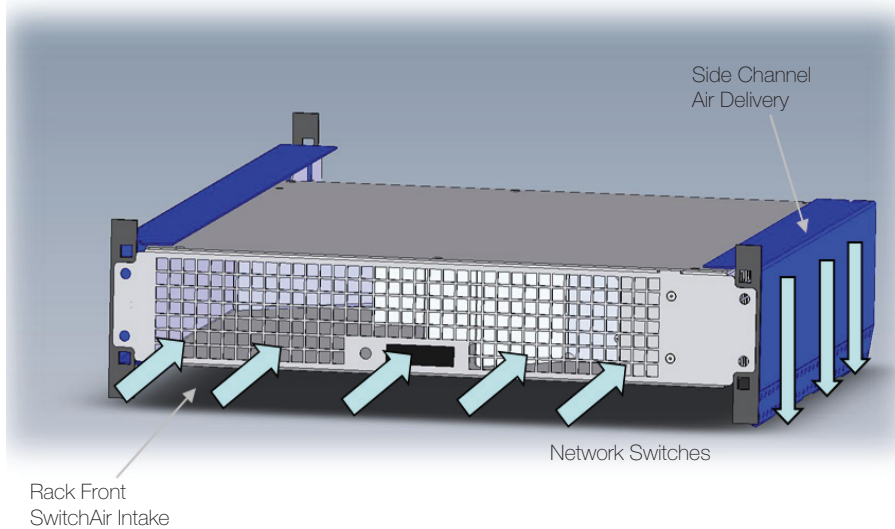

SA2-006 Specification

Chassis Depth	18"
Channel Length	Channel 1-18" Channel 2-26"
Input Power / Indicator	90-264 VAC 50/60 Hz 60 watts LED Power Indicator
Input Connector	C14 Input
Airflow	188 CFM
Switch Intake	Side
Safety / Approvals	UL, cUL 60950, CE, FCC, Class A
Warranty	2 Years



Geist Americas

800.432.3219
geistglobal.com

Geist DCiM
1.877.449.4150
geistglobal.com

Geist Europe

+44 (0) 1823 275100
geistglobal.com

Geist Asia

China
+86.755.86639505
geistglobal.com

Hong Kong
+852 90361927
geistglobal.com

Match your overheating network switch to Geist's ideal solution:

Manufacturer	Model
Cisco	6506, 6513, 6503, 6503E, 6504-E, 6506-E, 6509 (open post only), 6509E, 6509-NEB, 6509-NEB-A, 6509-V-E, 6513E, 7009 (open post only)
Cisco ASR	9006
Cisco MDS	9513
HP	5406ZL, 5412ZL
Juniper	MX480, SRX3600

Network Switch not listed?

Switch Cooling products are available in a wide range of configurations and rack space sizes. Allow Geist to develop the solution for you. Geist can custom manufacture a Switch Cooling device specific to your needs. Contact us at 800-432-3219.