




Low Profile Breakers

Geist's low profile breakers reduce the PDU depth by over 40% compared to traditional breakers. The slimmer design protects against electrical overloads and allows the PDUs to be easily installed in data center cabinets with limited space.

Geist offers low profile breakers as a standard feature on select basic and intelligent PDU configurations (See Table).

Customers may choose to incorporate the smaller breaker design on applicable custom PDU orders.

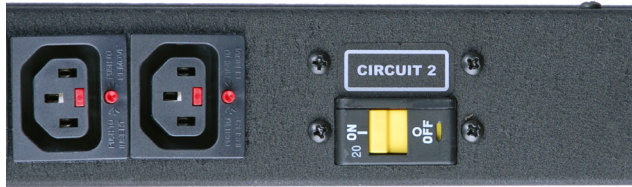

Standard Models with Low Profile Breakers

Model #	Amps & Volts kW	Receptacles	Plug	Rackmount Length	Monitoring
Current Monitoring Unit Level					
XPBM420-103IZ6TL6-LP	30A 208V 4.9kW	C13 Qty 36 C19 Qty 6	L6-30P	66 in	Current Local/ Remote
XPWM449-103MB1TL21-LP	30A 120/208V WYE 8.6kW	C13 Qty 36 C19 Qty 6 NEMA 5-20R Qty 2	L21-30P	72 in	Current Local/ Remote
XPWM428-103IZ6TL15-LP	30A 208V DELTA 8.6kW	C13 Qty 36 C19 Qty 6	L15-30P	72 in	Current Local/ Remote
Power Monitoring Unit Level					
RCXW300-103PN6TL6-D-LP	30A 208V 4.9kW	Locking C13 Qty 24 Locking C19 Qty 6	L6-30P	72 in	Power-Local/Remote+ Environmental Ports
RCXW308-103PN6TL21-D-LP	30A 120/208V WYE 8.6kW	Locking C13 Qty 24 Locking C19 Qty 6	L21-30P	72 in	Power-Local/Remote+ Environmental Ports
RCXW308-103PN6TL15-D-LP	30A 208V DELTA 8.6kW	Locking C13 Qty 24 Locking C19 Qty 6	L15-30P	72 in	Power-Local/Remote+ Environmental Ports
GRCXW306-103PN6PS6-D-LP	32A 230V 7.3kW	Locking C13 Qty 24 Locking C19 Qty 6	2P+E	72 in	Power-Local/Remote+ Environmental Ports
GRCXW303-103PN6PS56-D-LP	32A 230/400V WYE 22.1kW	Locking C13 Qty 24 Locking C19 Qty 6	3P+N+E	72 in	Power-Local/Remote+ Environmental Ports
Basic-Non-Surge					
GXPB426-103IZ6PS6-LP	32A 230V 7.3kW	C13 Qty 36 C19 Qty 6	2P+E	66 in	NA
GYB423-103IZ6PS56-LP	32A 230/400V WYE 22.1kW	C13 Qty 36 C19 Qty 6	3P+N+E	66 in	NA

Please note the information contained herein is for informational purposes only. Technical claims listed depend on a series of technical assumptions. Your experience with these products may differ if you operate the products in an environment, which is different from the technical assumptions. Geist reserves the right to modify these specifications without prior notice. Geist makes no warranties, express or implied, on the information contained in this document.

Geist Americas

1821 Yolande Ave
Lincoln, NE 68521 USA
1.800.432.3219 or
1.402.474.3400
www.geistglobal.com

Geist DCIM
2290 E Prospect Rd.
Fort Collins, CO 80525 USA
1.877.449.4150

Geist Europe

Unit 1, The Monarch Centre,
Ventruie Way,
Priorswood, Taunton,
Somerset, TA2 8DE UK
+44 (0) 1823 275100
www.geisteurope.com

Geist Asia

China
Tiley Plaza, Unit #2808,
No. 199 Haide 3 Road
Nanshan, Shenzhen
Guangdong Province, China
Postal Code: 518000
Tel: +86.755.86639505
www.geistglobal.com

Geist Asia

Hong Kong
Tel: +852 90361927
Email: salesasia@geistglobal.com
www.geistglobal.com