


Disclose and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

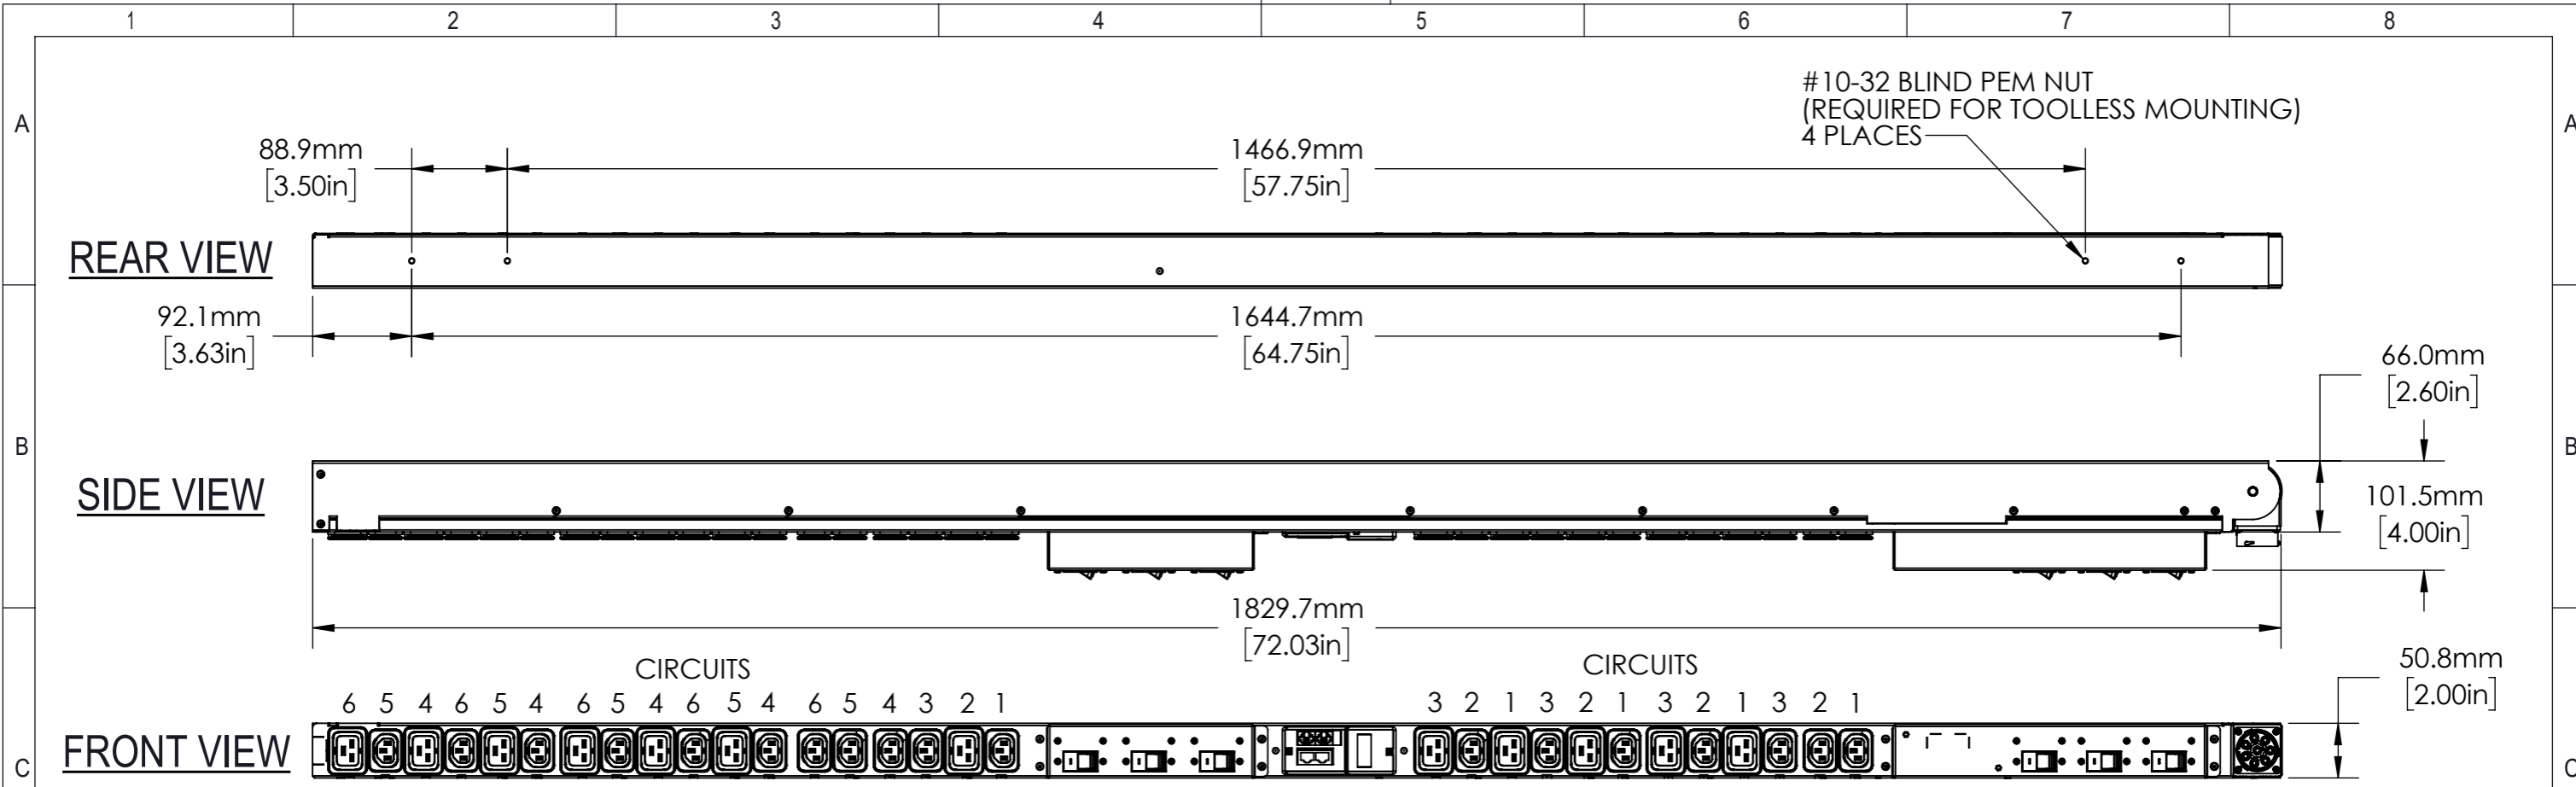

AGENCY COMPLIANCE:

- CE Marked
- RoHS Compliant
- Complies with EN 55032 and EN 55024
- Complies with IEC 60950-1 (CB Certificate Available)
- FCC Part 15 Class A Conformance
- RCM Mark (EMC Only)
- UL & c-UL Listed 60950
- China RoHS

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 60C / 140F

NOTES

- UNIT DIMENSIONS: 72in x 2in x 2.6in / 1829mm x 51mm x 66mm
- SHIPPED WEIGHT: 25lbs (11.34kg)
- SHIPPING DIMENSIONS: 87in x 9in x 6in / 2210mm x 229mm x 153mm
- Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

| METERING PARAMETER | MEASUREMENT ACCURACY |
|--------------------|--|
| VOLTAGE | ±1% |
| CURRENT | ±1% - Input Current ±2% - Circuit/Breaker Current |

OUTPUT POWER

| CIRCUIT | RECEPTACLE TYPE (QUANTITY) | VOLTAGE (V) | MAX. CONTINUOUS AMPS (A) | |
|---------|----------------------------|--------------------------------|--------------------------|-------------|
| | | | PER RECEPTACLE | PER CIRCUIT |
| 1 | 3xC13, 2xC19 | Defined by Facility Side Cable | 10/16 | 16 |
| 2 | 3xC13, 2xC19 | Defined by Facility Side Cable | 10/16 | 16 |
| 3 | 3xC13, 2xC19 | Defined by Facility Side Cable | 10/16 | 16 |
| 4 | 3xC13, 2xC19 | Defined by Facility Side Cable | 10/16 | 16 |
| 5 | 3xC13, 2xC19 | Defined by Facility Side Cable | 10/16 | 16 |
| 6 | 3xC13, 2xC19 | Defined by Facility Side Cable | 10/16 | 16 |

INPUT POWER

| INPUT INLET | FREQUENCY (Hz) | VOLTAGE (V) | RATED AMPS (A) | MAX. CONT. AMPS (A) |
|-----------------|----------------|--|--|--|
| Universal Inlet | 50/60 | 100-240 VAC (Single Phase FSC) | 48A (63A CB) Max (Single Phase FSC) | 48A (63A CB) Max (Single Phase FSC) |
| | | 100-240 V 3~ (4-wire Delta FSC) | 48A Max (4-wire Delta FSC) | 48A Max (4-wire Delta FSC) |
| | | 100-240/208-415 VAC 3~ (5 wire WYE FSC) | 24A (32A CB) Max (5 wire WYE FSC) | 24A (32A CB) Max (5 wire WYE FSC) |

Universal Input



| | | | | | | | |
|-------------------------|---|---------|----------------------|------------------------------|--|------------------|-----------------------|
| <p>Dimensions in mm</p> | Allgemeintoleranzen General tolerances | | Oberfläche Finish | | Werkstoff / Material | | Gewicht: - Weight: |
| | - | | - | | - | | |
| | Drawn | 5/03/20 | Name | | Bezeichnung / Description | | |
| | Checked | - | - | | rPDU, Switched Outlet Level Monitoring EC, Max 22.0kW, Variable Power Configuration, Vertical, (18) Locking IEC C13, (12) Locking IEC C19, Universal Input, Black Powder Coat. | | |
| Approved | - | - | | Zeichnungs-Nr. / Drawing no. | | Maßstab Scale | |
| | | | | UU30010L | | 1:6 | |
| | | | | Verwendet in / Used in | | Blatt/Sheet | 1/1 |
| | | | | - | | | |