


4

3

2

1

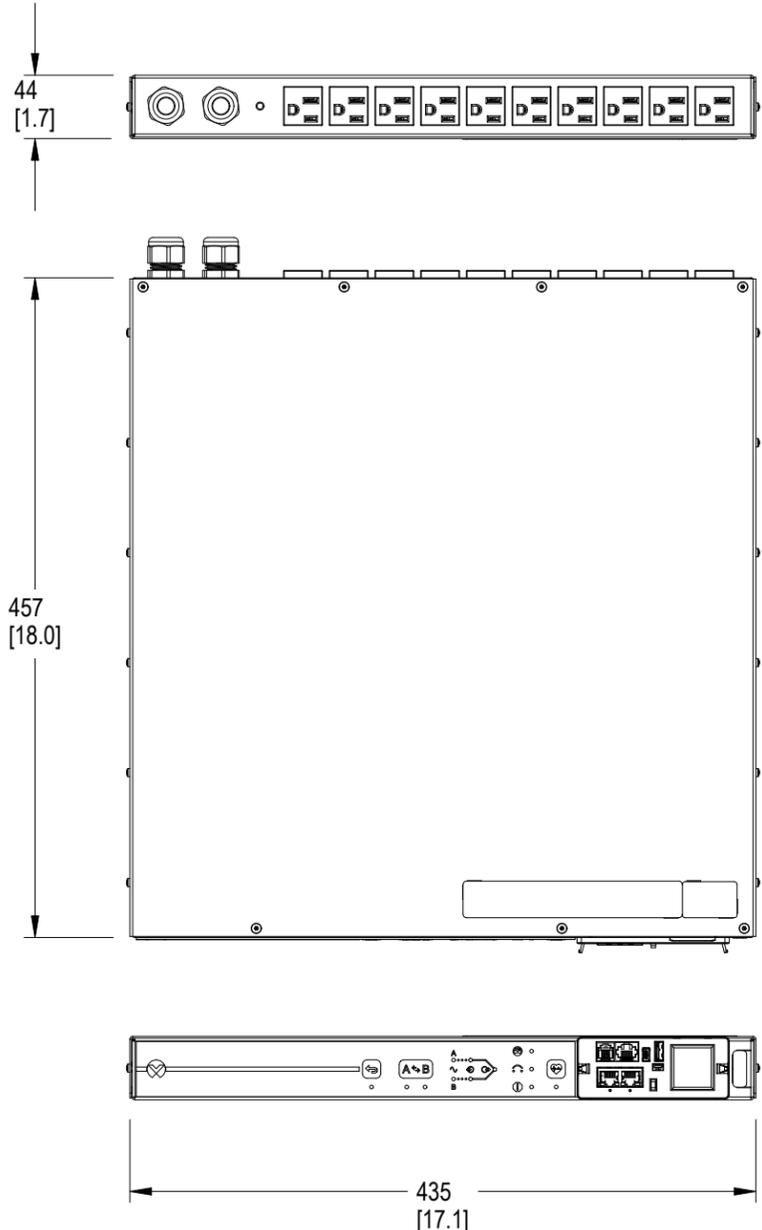

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	10x NEMA 5-15R	100-120	12	12

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft/3m	2x 5-15P	2/PE	50/60	100-120V	15A	12A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current

AGENCY COMPLIANCE:
 RoHS Compliant
 FCC Part 15 Class A Conformance
 UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:
 Maximum Operating Temperature: 60C/140F

NOTES:
 UNIT DIMENSIONS: 1.72in x 17in x 18in / 44mm x 432mm x 457mm
 Shipped Weight: 17lbs (7.71kg)

CORPORATE CAGE CODE 1EDC2		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521	VA4N11A0	rPDU, Rack Transfer Switch Monitored Unit Level, 15A, 120V, 1.4kW, Horizontal, (10) NEMA 5-15R, 10ft / 3m power cords with 5-15P, Black Powder Coat												
		505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082	PART NUMBER	DESCRIPTION												
<small>© 2025 VERTIV GROUP CORP. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORP. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORP. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT USE (EXCEPT SOLELY FOR THE BENEFIT OF VERTIV GROUP CORP.), SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORP., AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORP. IMMEDIATELY UPON REQUEST.</small>																
MATERIAL: N/A		<small>UNLESS OTHERWISE SPECIFIED TOLERANCE</small> <table border="1"> <thead> <tr> <th>MM (PRIMARY)</th> <th>INCHES (SECONDARY)</th> </tr> </thead> <tbody> <tr> <td>X ±.25</td> <td>(X) ±.1</td> </tr> <tr> <td>.X ±.75</td> <td>(.XX) ±.03</td> </tr> <tr> <td>.XX ±.25</td> <td>(.XXX) ±.01</td> </tr> <tr> <td>HOLE DIA +.08</td> <td>HOLE DIA +.003</td> </tr> <tr> <td>ANGULAR</td> <td>±2°</td> </tr> </tbody> </table>			MM (PRIMARY)	INCHES (SECONDARY)	X ±.25	(X) ±.1	.X ±.75	(.XX) ±.03	.XX ±.25	(.XXX) ±.01	HOLE DIA +.08	HOLE DIA +.003	ANGULAR	±2°
MM (PRIMARY)	INCHES (SECONDARY)															
X ±.25	(X) ±.1															
.X ±.75	(.XX) ±.03															
.XX ±.25	(.XXX) ±.01															
HOLE DIA +.08	HOLE DIA +.003															
ANGULAR	±2°															
DESIGNED BY: CARLOS ARROYO	DATE: 2025-12-16	WEIGHT: -	CONTROL CHARACTERISTICS PART DESCRIPTION AN05M1R0-10S153-1S15T5A011-D													
DRAWN BY: CARLOS ARROYO	DATE: 2025-12-16	SHEET: 1/1	THIRD ANGLE PROJECTION SIZE B	SCALE: 1:5 DOCUMENT NUMBER: VA4N11A0												

4

3

2

1