
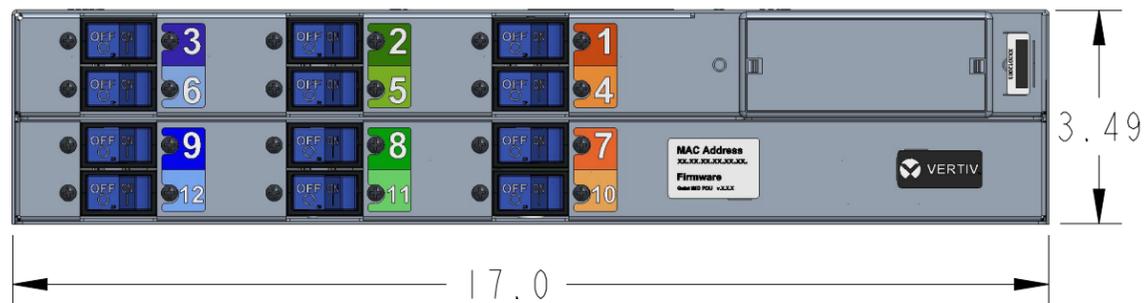
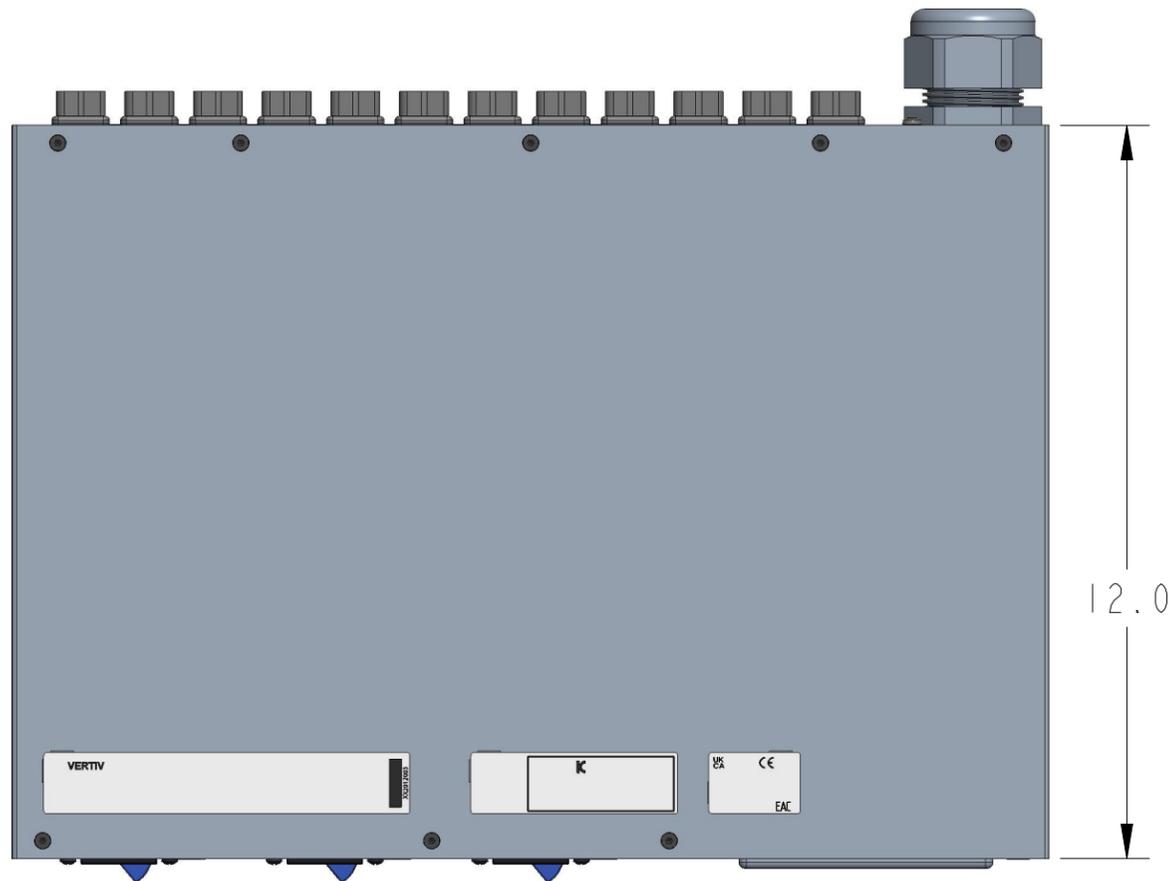


CO NO	REV	DESCRIPTION	DRAWN BY:	DATE
N/A	A	INITIAL DRAWING	LAC PHAN	2026-02-26

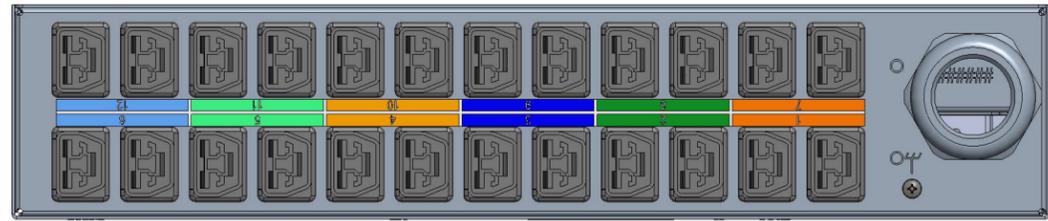

OUTPUT POWER					
CIRCUIT	PHASE	RECEPTACLE TYPE (QTY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	SDG400 (2)	277	16	16
2	B	SDG400 (2)	277	16	16
3	C	SDG400 (2)	277	16	16
4	A	SDG400 (2)	277	16	16
5	B	SDG400 (2)	277	16	16
6	C	SDG400 (2)	277	16	16
7	A	SDG400 (2)	277	16	16
8	B	SDG400 (2)	277	16	16
9	C	SDG400 (2)	277	16	16
10	A	SDG400 (2)	277	16	16
11	B	SDG400 (2)	277	16	16
12	C	SDG400 (2)	277	16	16

INPUT POWER						
INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX CONT. AMPS (A)
10 FT	3P+N+E (IP67)	3/N/PE	50/60	277/480 WYE	60	48

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% Circuit/Breaker Current

AGENCY COMPLIANCE:
 ETL & c-ETL Listed to UL 62368-1
 RoHS Compliant
 FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
 Maximum Operating Temperature: 60°C/140°F

NOTES:
 UNIT DIMENSIONS: 3.49in x 17in x 12in / 89mm x 432mm x 305mm
 SHIPPED WEIGHT: 31lb (14.1kg)
 SHIPPING DIMENSIONS: 25in x 14in x 6in / 635mm x 356mm x 153mm

CORPORATE CAGE CODE 1EDC2		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521		VP1N62A3		rPDU, Basic Upgradeable, 60A, 277/480V WYE, 39.8kW, 2U, (15) Anderson SAF-D Grid Connectors	
MATERIAL: N/A		FINISH: N/A		DESIGNED BY: LAC PHAN		DATE: 2026-02-26	
WEIGHT: -		SHEET: 1/1		DRAWN BY: LAC PHAN		DATE: 2026-02-26	
UNLESS OTHERWISE SPECIFIED TOLERANCE		CONTROL CHARACTERISTICS		THIRD ANGLE PROJECTION		SIZE B	
MM (PRIMARY)		INCHES (SECONDARY)		SCALE		DOCUMENT NUMBER	
±.25		±.005		1:1		PMN05M2A1-15SDG3-8PS2 2D7H10-S	
±.125		±.002		AS SHOWN		REV	
±.062		±.001		AS SHOWN		0	
±.031		±.0005		AS SHOWN		1	
HOLE DIA		HOLE DIA		AS SHOWN		2	
±.003		±.003		AS SHOWN		3	
ANGULAR		ANGULAR		AS SHOWN		4	
±.2°		±.2°		AS SHOWN		5	