


CO NO	REV	DESCRIPTION	DRAWN BY:	DATE
-	1	Submittal drawing	A.PAWAR	2026-02-09

#10-32 BLIND PEM NUT
(REQUIRED FOR TOOLLESS MOUNTING)
3 PLACES

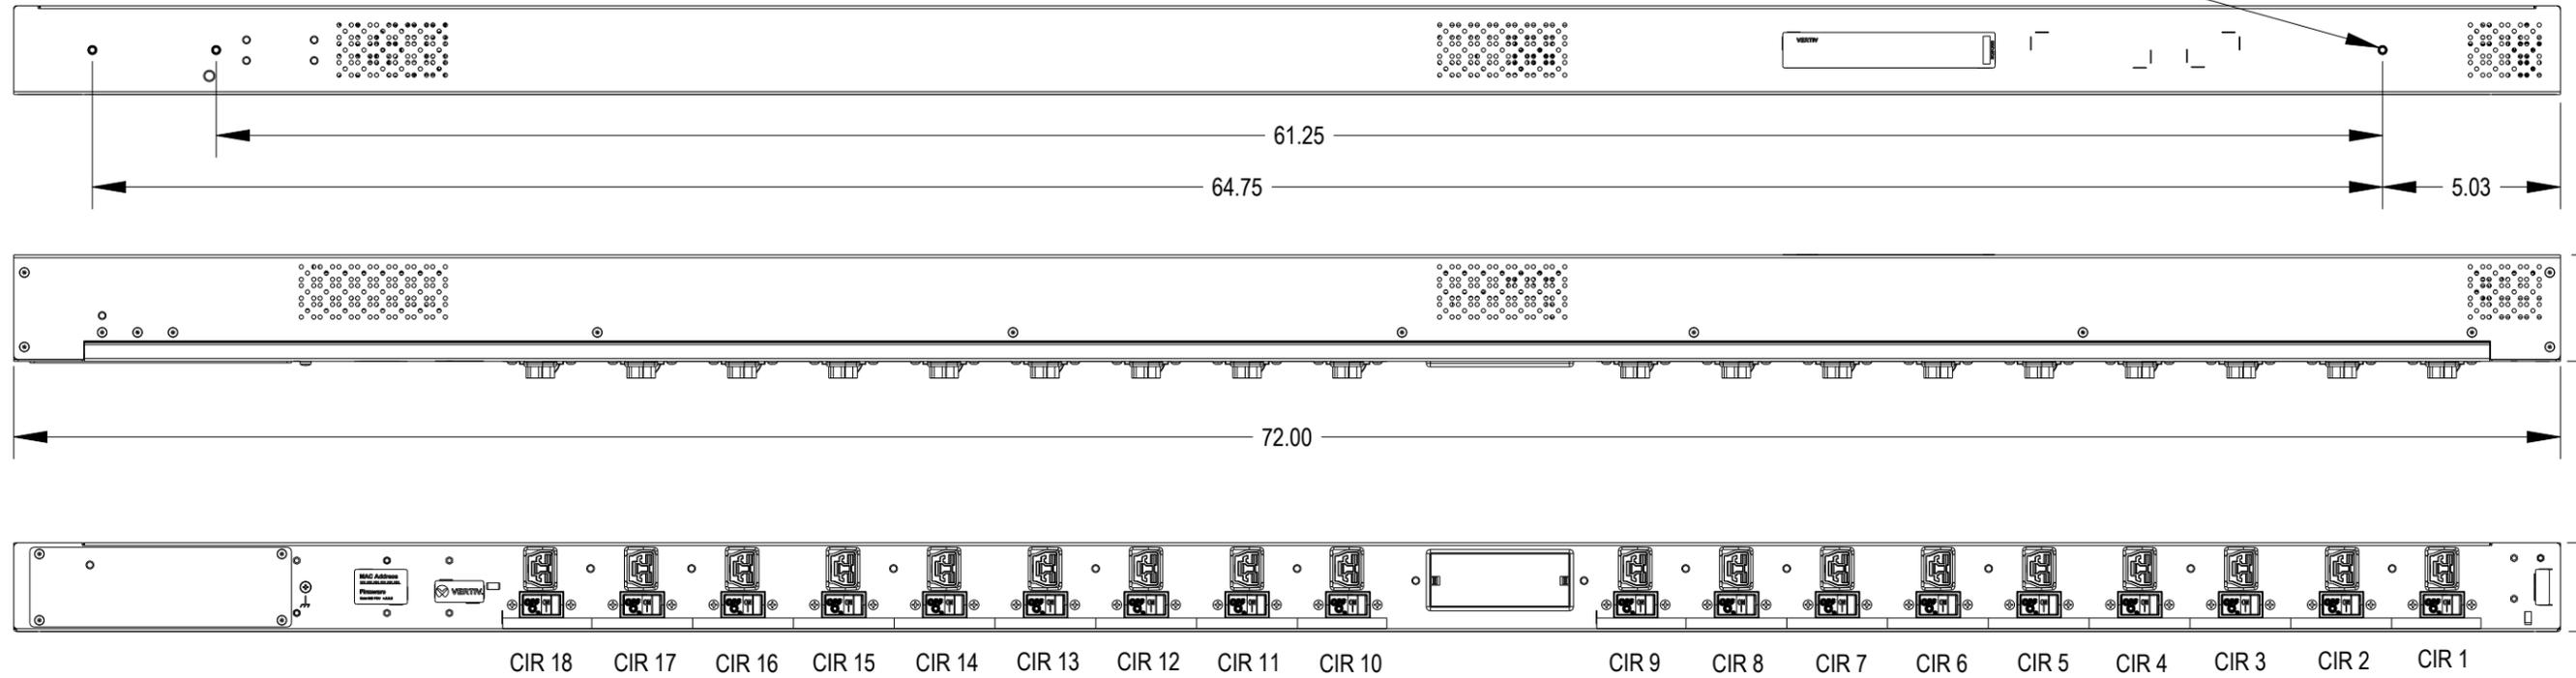

OUTPUT POWER-

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	1xSDG400	277	16	16
2	B	1xSDG400	277	16	16
3	C	1xSDG400	277	16	16
4	A	1xSDG400	277	16	16
5	B	1xSDG400	277	16	16
6	C	1xSDG400	277	16	16
7	A	1xSDG400	277	16	16
8	B	1xSDG400	277	16	16
9	C	1xSDG400	277	16	16
10	A	1xSDG400	277	16	16
11	B	1xSDG400	277	16	16
12	C	1xSDG400	277	16	16
13	A	1xSDG400	277	16	16
14	B	1xSDG400	277	16	16
15	C	1xSDG400	277	16	16
16	A	1xSDG400	277	16	16
17	B	1xSDG400	277	16	16
18	C	1xSDG400	277	16	16

AGENCY COMPLIANCE-
ETL & c-ETL Listed to UL 62368-1
RoHS Compliant
FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING-
Maximum Operating Temperature: 60C / 140F

NOTES-
UNIT DIMENSIONS: 72in x 2.5 in x 3in / 1829mm x 64mm x 77mm
SHIPPED WEIGHT: 20lbs (9.1kg)
SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

INPUT POWER-

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
Not applicable	Hardwired	3/N/PE	50/60	277/480V WYE	80	80

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	± 1%
CURRENT	± 1% - Input Current ± 1% - Circuit/Breaker Current

CORPORATE CAGE CODE 1EDC2		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521	VP1NA0A4	rPDU, Basic Upgradeable, 80A, 277/480V WYE, 66.4kW Vertical, (18) Anderson 2005N4 Keyed SAF-D Grid Connectors, Hard Wired, Black Powder Coat.
DESIGNED BY: A.PAWAR		DATE: 2026-02-09	WEIGHT: -	PART DESCRIPTION rPDU, Basic Upgradeable, 80A, 277/480V WYE, 66.4kW Vertical, (18) Anderson 2005N4 Keyed SAF-D Grid Connectors, Hard Wired, Black Powder Coat.
DRAWN BY: A.PAWAR		DATE: 2026-02-09	SHEET: 1/1	THIRD ANGLE PROJECTION CONTROL CHARACTERISTICS SCALE 7:100 DOCUMENT NUMBER VP1NA0A4 SUBMITTAL REV 1