
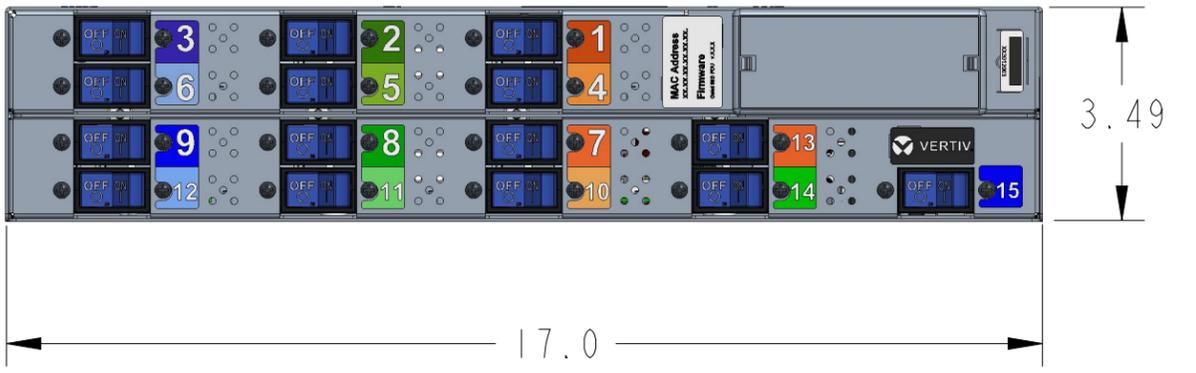
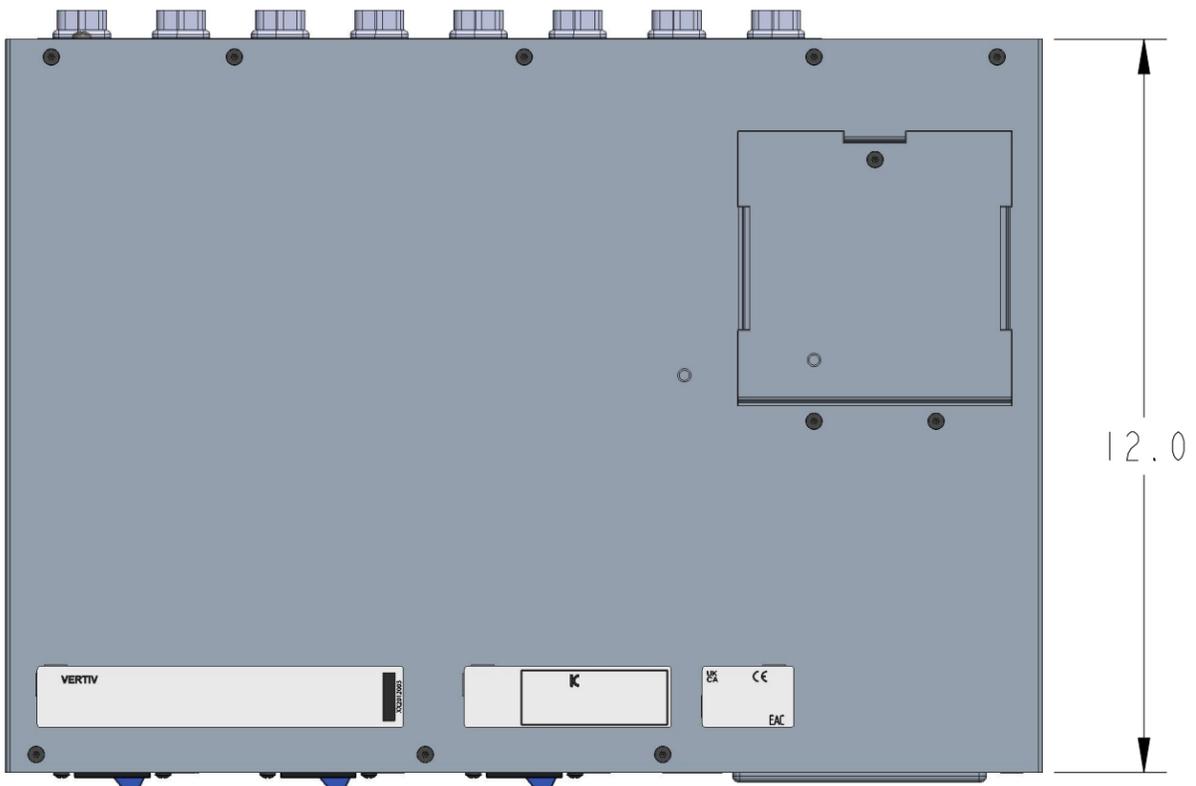


CO NO	REV	DESCRIPTION	DRAWN BY:	DATE
N/A	A	INITIAL DRAWING	LAC PHAN	2026-02-26

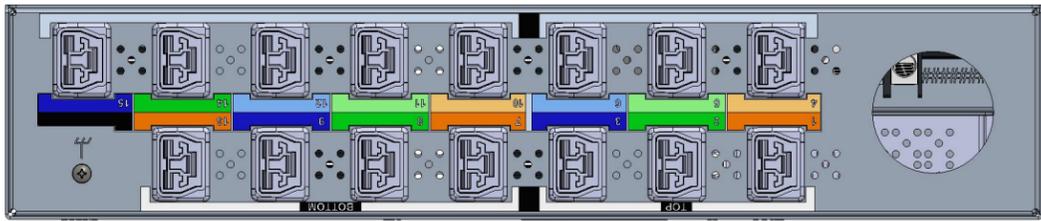

OUTPUT POWER					
CIRCUIT	PHASE	RECEPTACLE TYPE (QTY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	SDG400 (1)	277	16	16
2	B	SDG400 (1)	277	16	16
3	C	SDG400 (1)	277	16	16
4	A	SDG400 (1)	277	16	16
5	B	SDG400 (1)	277	16	16
6	C	SDG400 (1)	277	16	16
7	A	SDG400 (1)	277	16	16
8	B	SDG400 (1)	277	16	16
9	C	SDG400 (1)	277	16	16
10	A	SDG400 (1)	277	16	16
11	B	SDG400 (1)	277	16	16
12	C	SDG400 (1)	277	16	16
13	A	SDG400 (1)	277	16	16
14	B	SDG400 (1)	277	16	16
15	C	SDG400 (1)	277	16	16

INPUT POWER						
INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX CONT. AMPS (A)
Not Applicable	Hardwired	3/N/PE	50/60	277/480 WYE	80	80

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% Circuit/Breaker Current

AGENCY COMPLIANCE:
 ETL & c-ETL Listed to UL 62368-1
 RoHS Compliant
 FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
 Maximum Operating Temperature: 60°C/140°F

NOTES:
 UNIT DIMENSIONS: 3.49in x 17in x 12in / 89mm x 432mm x 305mm
 SHIPPED WEIGHT: 20lb (9.1kg)
 SHIPPING DIMENSIONS: 25in x 14in x 6in / 635mm x 356mm x 153mm

CORPORATE CAGE CODE 1EDC2		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521		VP1NA2A0		rPDU, Basic Upgradeable, 80A, 277/480V WYE, 66.4kW, 2U, (15) Anderson SAF-D Grid Connectors	
MATERIAL: N/A		FINISH: N/A		DESIGNED BY: LAC PHAN		DATE: 2026-02-26	
WEIGHT: -		SHEET: 1/1		THIRD ANGLE PROJECTION		CONTROL CHARACTERISTICS	
DRAWN BY: LAC PHAN		DATE: 2026-02-26		SIZE B		SCALE 1:1	
UNLESS OTHERWISE SPECIFIED TOLERANCES: MM (PRIMARY) INCHES (SECONDARY)		ANGULAR		HOLE DIA		±.003	
PMN05MZA1-15SDG3-8PS2 2D7H10-S		DOCUMENT NUMBER VP1NA2A0_SUBMITTAL		REV			