


4

3

2

1

#10-32 BLIND PEM NUT
(REQUIRED FOR TOOLLESS MOUNTING)
3 PLACES

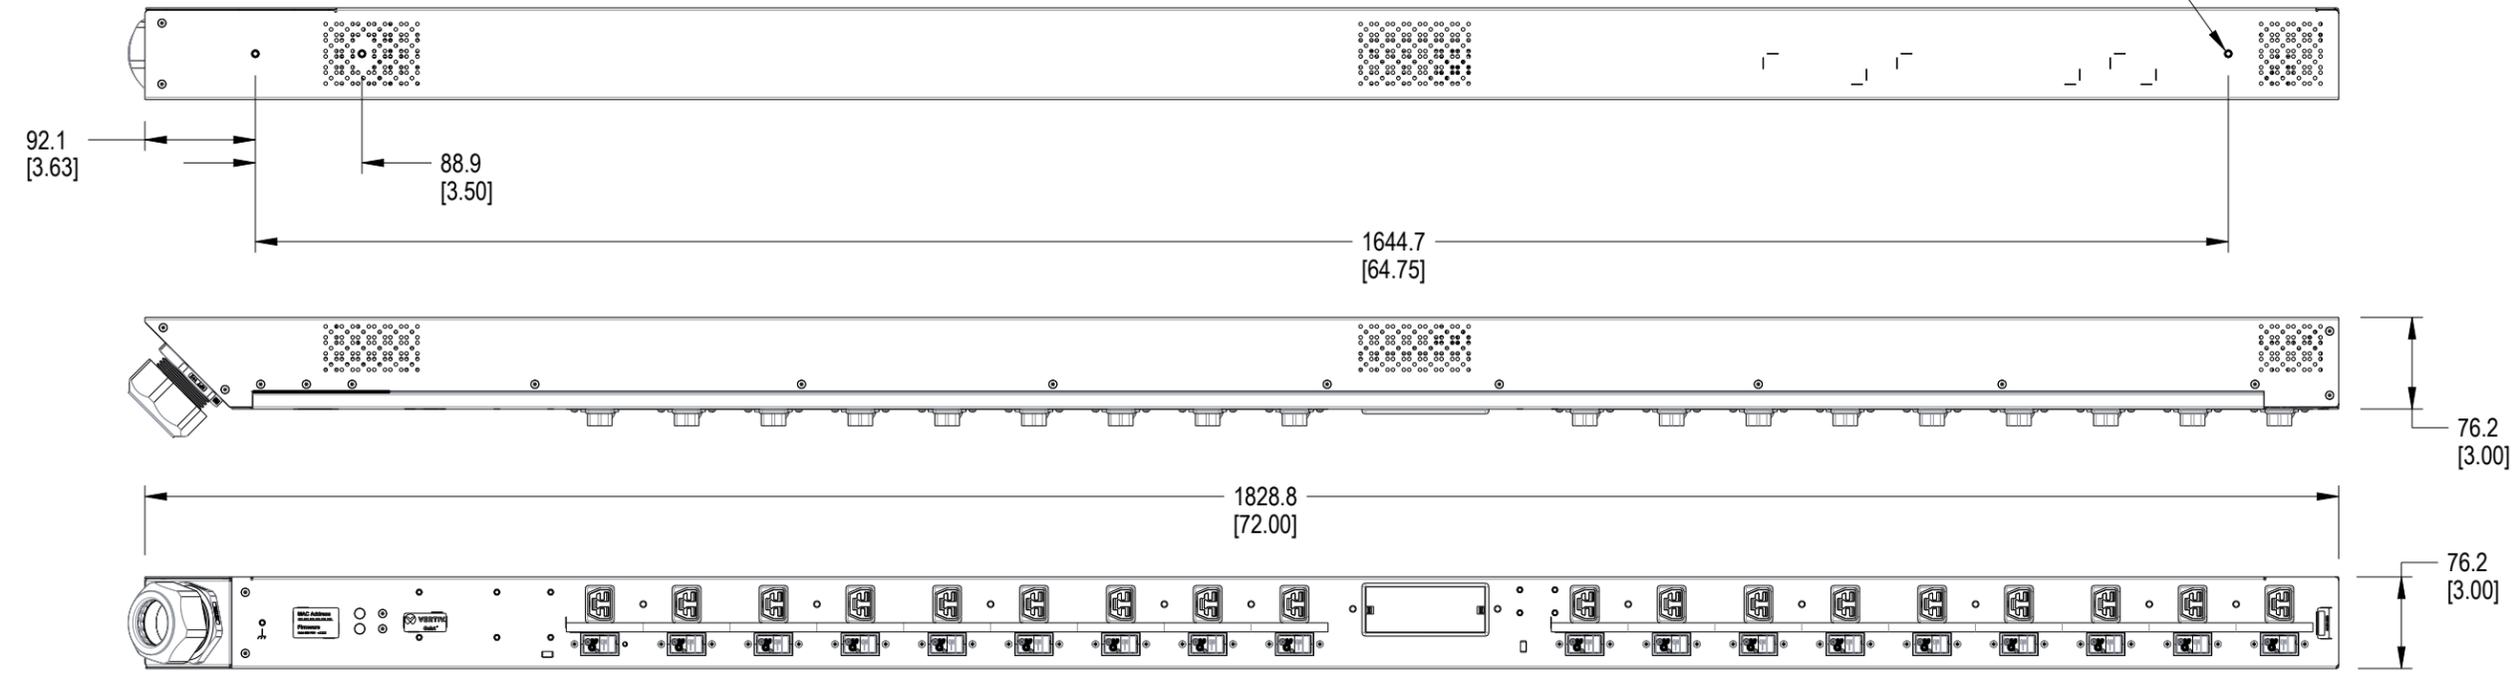

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	1xSDG400	277	16	16
2	B	1xSDG400	277	16	16
3	C	1xSDG400	277	16	16
4	A	1xSDG400	277	16	16
5	B	1xSDG400	277	16	16
6	C	1xSDG400	277	16	16
7	A	1xSDG400	277	16	16
8	B	1xSDG400	277	16	16
9	C	1xSDG400	277	16	16
10	A	1xSDG400	277	16	16
11	B	1xSDG400	277	16	16
12	C	1xSDG400	277	16	16
13	A	1xSDG400	277	16	16
14	B	1xSDG400	277	16	16
15	C	1xSDG400	277	16	16
16	A	1xSDG400	277	16	16
17	B	1xSDG400	277	16	16
18	C	1xSDG400	277	16	16

3P+N+E (IP67)



AGENCY COMPLIANCE:
ETL & c-ETL Listed to UL 62368-1
RoHS Compliant
FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C / 140F

NOTES
UNIT DIMENSIONS: 72in x 3in x 3in / 1829mm x 77mm x 77mm
SHIPPED WEIGHT: 30lbs (13.6kg)
SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% - Circuit/Breaker Current

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft	3P+N+E (IP67)	3/N/PE	50/60	277/480V WYE	100A	80A

CORPORATE CAGE CODE 1EDC2		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521	VP1NC0A1	VP4NC0A1-ASM												
		505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082	PART NUMBER	DESCRIPTION												
<small>© 2025 VERTIV GROUP CORP. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORP. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORP. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT USE (EXCEPT SOLELY FOR THE BENEFIT OF VERTIV GROUP CORP.), SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORP., AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORP. IMMEDIATELY UPON REQUEST.</small>																
MATERIAL: N/A		UNLESS OTHERWISE SPECIFIED TOLERANCE														
FINISH: N/A		<table border="1"> <thead> <tr> <th>MM (PRIMARY)</th> <th>INCHES (SECONDARY)</th> </tr> </thead> <tbody> <tr> <td>X ±.25</td> <td>(X) ±.1</td> </tr> <tr> <td>XX ±.75</td> <td>(XX) ±.03</td> </tr> <tr> <td>XX ±.25</td> <td>(XXX) ±.01</td> </tr> <tr> <td>HOLE DIA +.08</td> <td>HOLE DIA +.003</td> </tr> <tr> <td>ANGULAR</td> <td>±2°</td> </tr> </tbody> </table>			MM (PRIMARY)	INCHES (SECONDARY)	X ±.25	(X) ±.1	XX ±.75	(XX) ±.03	XX ±.25	(XXX) ±.01	HOLE DIA +.08	HOLE DIA +.003	ANGULAR	±2°
MM (PRIMARY)	INCHES (SECONDARY)															
X ±.25	(X) ±.1															
XX ±.75	(XX) ±.03															
XX ±.25	(XXX) ±.01															
HOLE DIA +.08	HOLE DIA +.003															
ANGULAR	±2°															
DESIGNED BY: JEFF MICEK	DATE: 2026-02-24	WEIGHT: -	CONTROL CHARACTERISTICS PART DESCRIPTION VP4NC0A1-ASM													
DRAWN BY: JEFF MICEK	DATE: 2026-02-24	SHEET: 1/1	THIRD ANGLE PROJECTION	SCALE 1:6												
			SIZE B	DOCUMENT NUMBER VP1NC0A1												

4

3

2

1