


Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

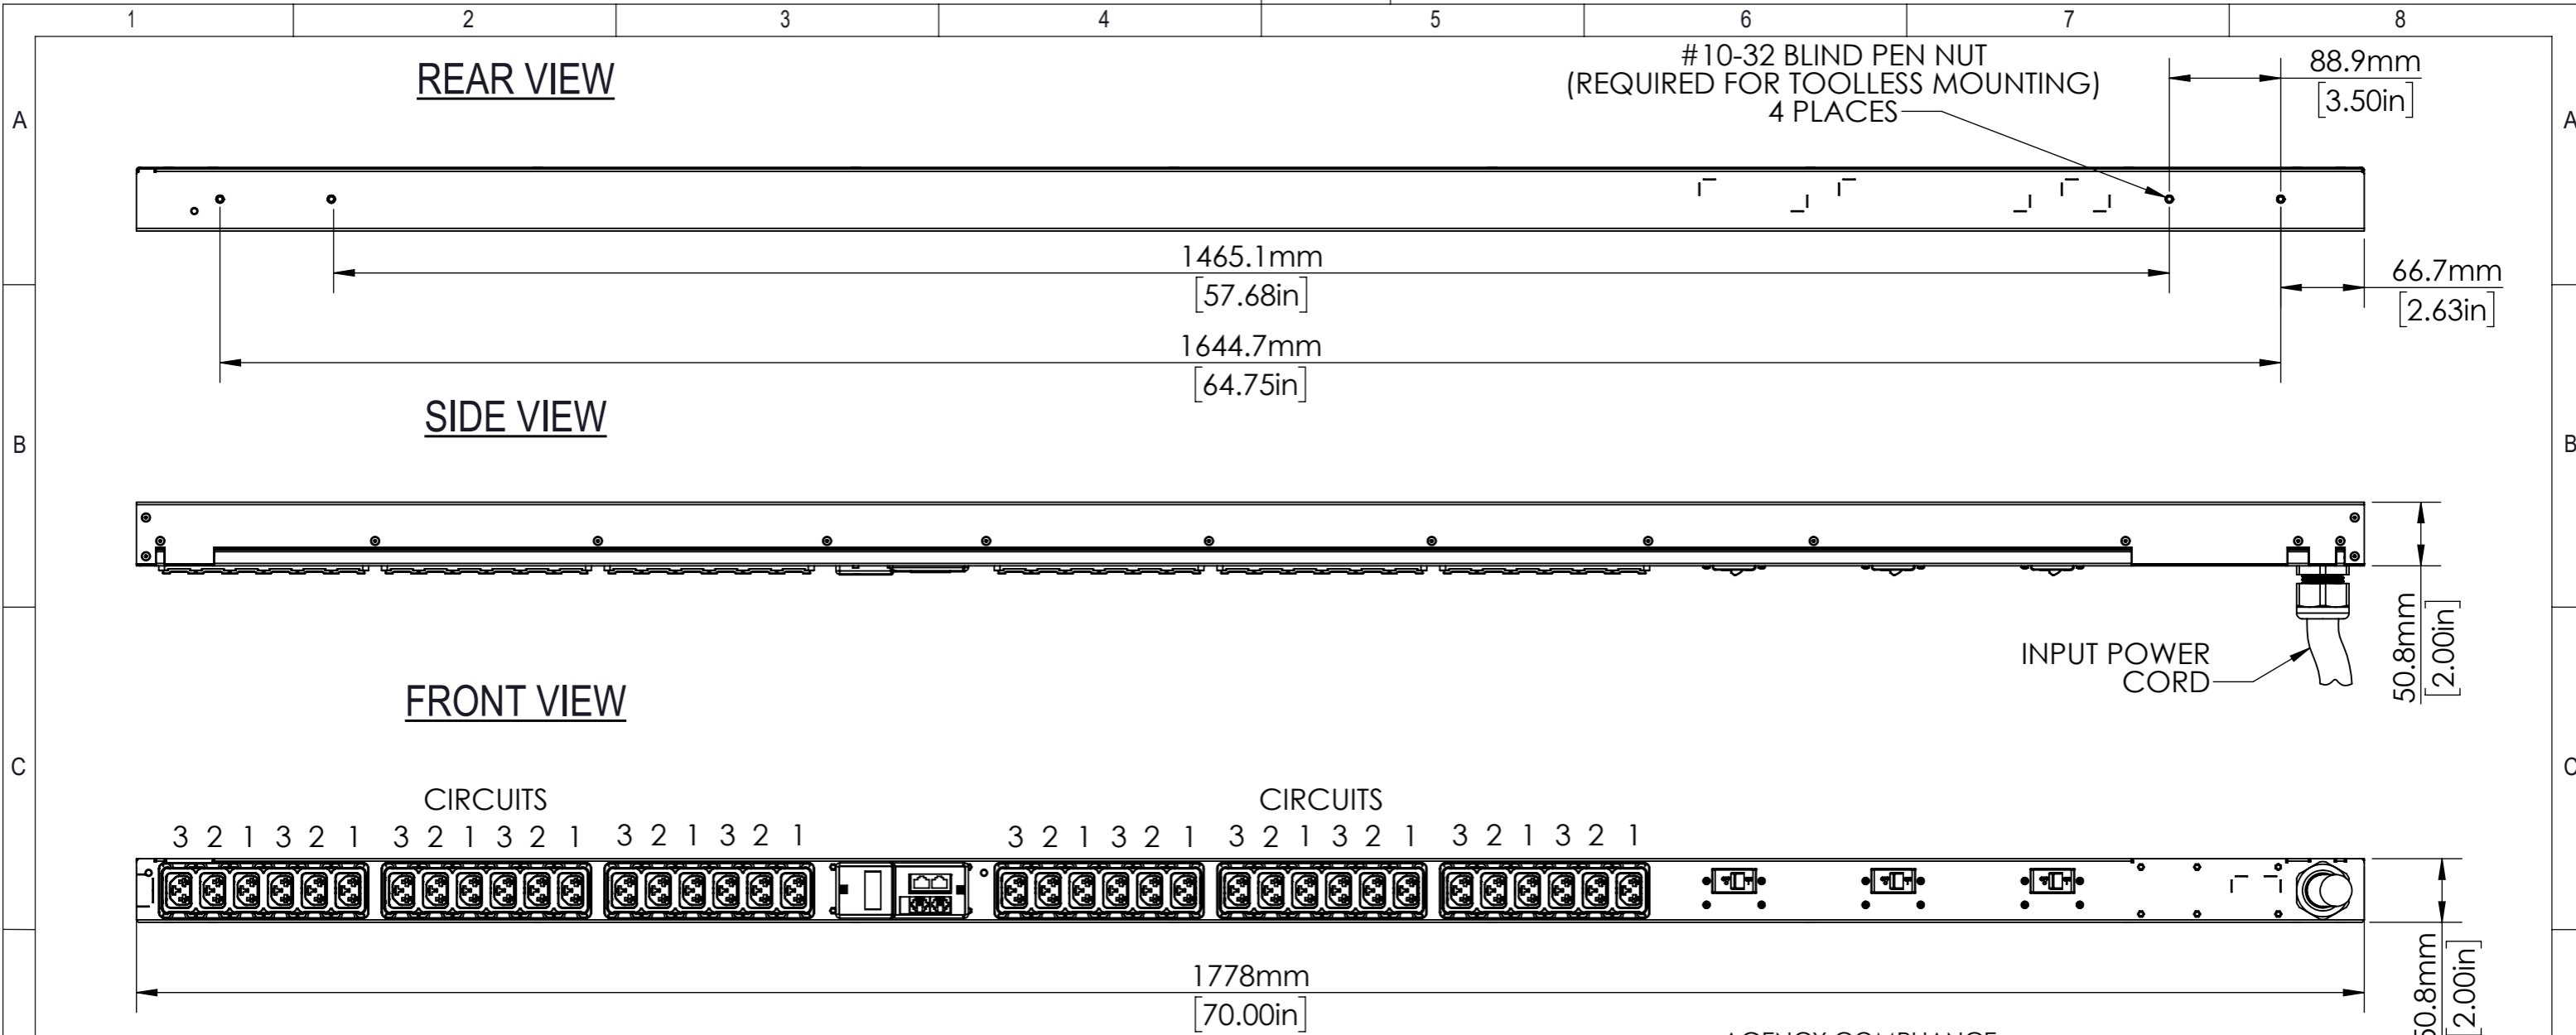

**OUTPUT POWER**

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	12xCombination C13/C19	200-240V	12(C14)/16(C20)	16
2	B	12xCombination C13/C19	200-240V	12(C14)/16(C20)	16
3	C	12xCombination C13/C19	200-240V	12(C14)/16(C20)	16

**INPUT POWER**

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft / 3m	NEMA L21-30P	3/N/PE	50/60	120/208V	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current



**AGENCY COMPLIANCE:**  
 RoHS Compliant  
 FCC Part 15 Class A Conformance  
 UL Listed 60950

**ENVIRONMENTAL RATING:**  
 Maximum Operating Temperature: 60C / 140F

**NOTES**  
 UNIT DIMENSIONS: 70in x 2in x 2in / 1778mm x 51mm x 51mm  
 SHIPPED WEIGHT: 17lbs (7.71kg)  
 SHIPPING DIMENSIONS: 87in x 9in x 6in / 2210mm x 229mm x 153mm  
 Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

<p>Dimensions in mm</p>	Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: - Weight:		
	-		-		-		-		
Rev.	Change	Date	Name	Bezeichnung / Description		VP43302 rPDU, Monitored Unit Level EC, 30A, 120/208V WYE, 8.6kW, Vertical, (36) Combination C13/C19, 10ft / 3m power cord with L21-30P, Black Powder Coat.			
				Drawn	Date				Name
				Checked	-				-
				Approved	-	-	Zeichnungs-Nr. / Drawing no.		
						<b>VP43302</b>		Maßstab Scale	
						Verwendet in / Used in		Blatt/Sheet	
						-		1/1	