Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

REAR VIEW

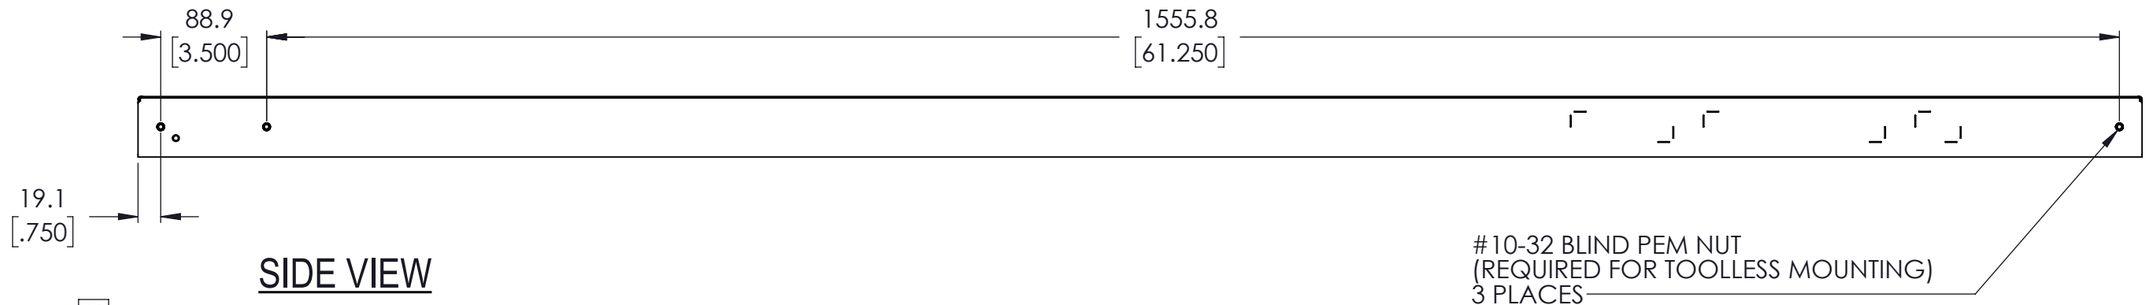

SIDE VIEW

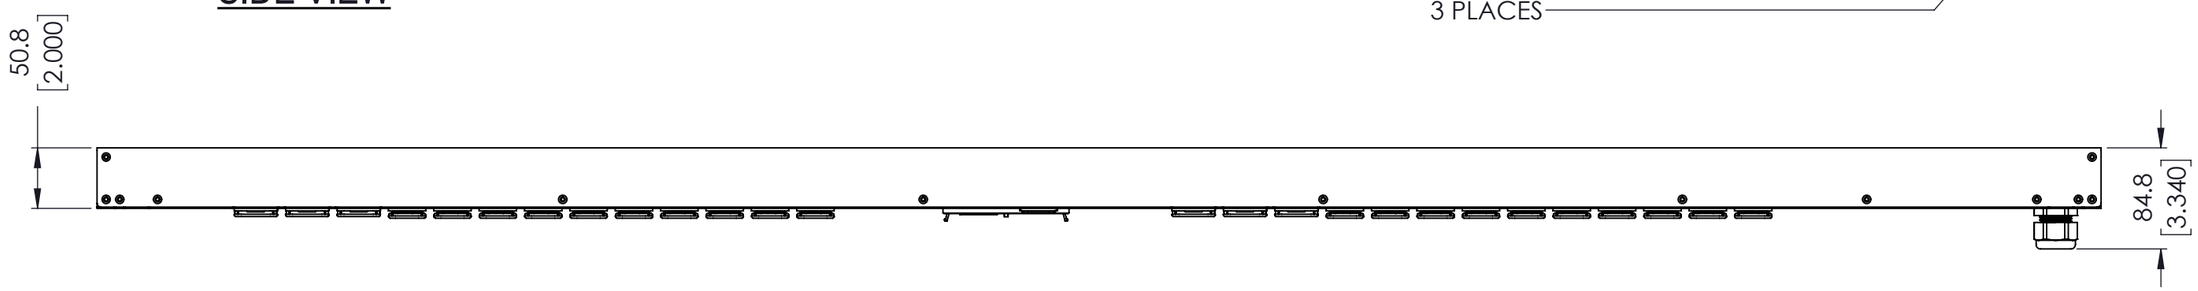

FRONT VIEW

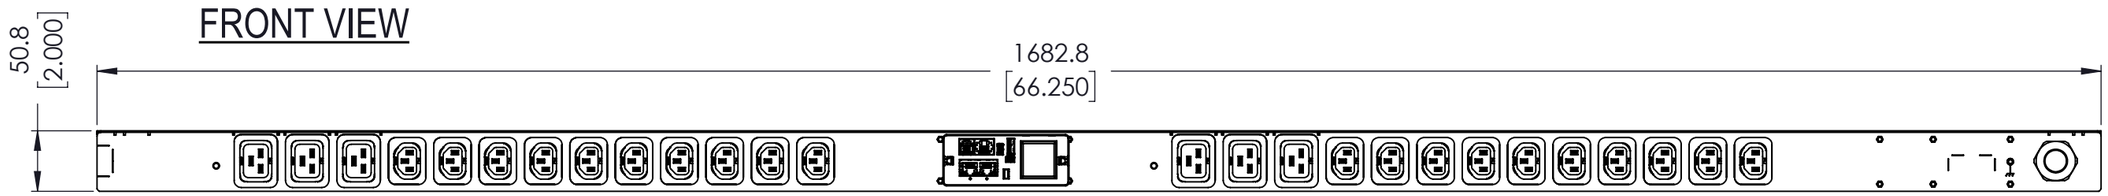

AGENCY COMPLIANCE:

RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 60C/140F

NOTES:

UNIT DIMENSIONS: 66.25in x 2in x 2in / 1683mm x 51mm x 51mm
SHIPPED WEIGHT: 15lbs (6.8kg)
Mounting Hardware: 7938 Vertical Mounting Bracket Kit; Toolless Mounting Hardware - Center to Center Spacing: 61.25in and 64.75in

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	20x U-Lock IEC C13 6x U-Lock IEC C19	208V	12/16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft/3m	NEMA L6-20P Twistlock	2/PE	50/60	200-240V	20A	16A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current

L6-20P

Rev.	Change	Date	Name
-	-	-	-

Dimensions in mm

Allgemeintoleranzen
General tolerances
CHASSIS (L,W,D) ±0.8mm
CORD - ±3.2mm

Oberfläche
Finish
PAINT - BLACK WRINKLE POWDER

Werkstoff / Material
18 GAUGE STEEL OR METRIC EQUIVALENT -

Gewicht: -
Weight:

	Date	Name
Drawn	4/7/2025	CA
Checked	-	-
Approved	-	-

Bezeichnung / Description
rPDU, Monitored Unit Level EC, 20A, 208V, 3.3kW, Vertical, (20) Locking IEC C13, (6) Locking IEC C19, 10ft power cord with L6-20P, Black Powder Coat.

VERTIV™

Zeichnungs-Nr. / Drawing no.
VP4N20A5

Maßstab
Scale
1:5

Verwendet in / Used in
-

Blatt/Sheet
1/1