


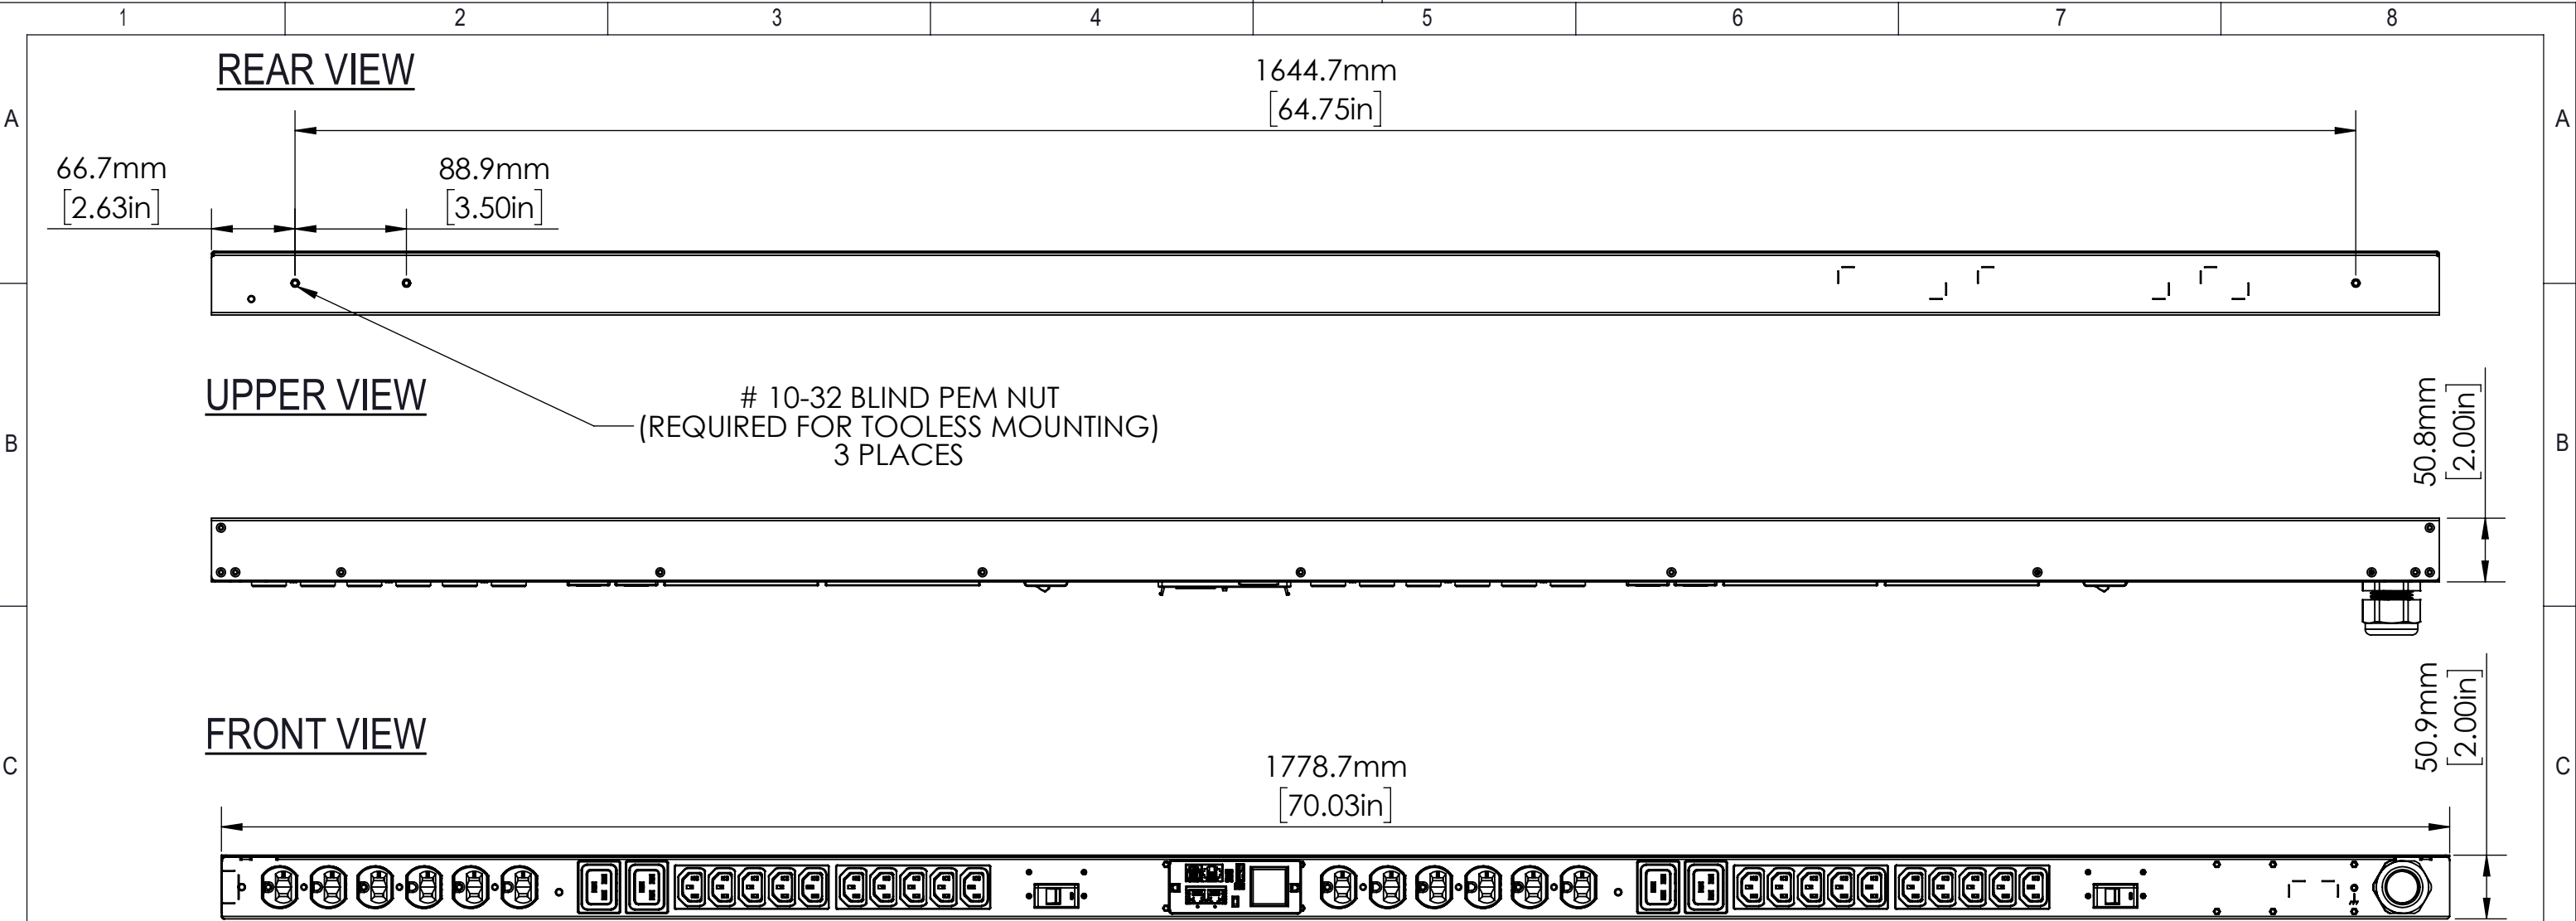

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	10x IEC C13	200-240	12	16
1	2x IEC C19	200-240	16	16
1	6x NEMA 5-20R	100-120	16	16
2	10x IEC C13	200-240	12	16
2	2x IEC C19	200-240	16	16
2	6x NEMA 5-20R	100-120	16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft/3m	NEMA L14-30P Twistlock	2/N/PE	50/60	100-120/200-240V	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current



L14-30P

AGENCY COMPLIANCE:


RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 60C/140F

NOTES

UNIT DIMENSIONS: 70in x 2in x 2in / 1778mm x 51mm x 51mm
SHIPPED WEIGHT: 17lbs (7.71kg)
Mounting Hardware: 7938 Vertical Mounting Bracket Kit; Toolless Mounting Hardware - Center to Center Spacing 61.25in and 64.75in

 Dimensions in mm				Allgemeintoleranzen General tolerances CHASSIS(L,W,D) ± 0.8mm CORD - ± 3.2mm		Oberfläche Finish PAINT - BLACK WRINKLE POWDER		Werkstoff / Material 18 GAUGE SEEL OR METRIC EQUIVALENT -		Gewicht: - Weight:	
						Date 06/02/2025		Name JJC		Bezeichnung / Description rPDU, Monitored Unit Level EC, 30A, 120/208V, 5.7kW, Vertical, (20) IEC C13, (4) IEC C19, (12) NEMA 5-20R, 10ft power cord with L14-30P, Black Powder Coat.	
Drawn		Checked		Approved							
				 VERTIV™		Zeichnungs-Nr. / Drawing no. VP4N30AH				Maßstab Scale 1:10	
						Verwendet in / Used in -				Blatt/Sheet 1/1	