

D

C

B


A

D

C

B

A

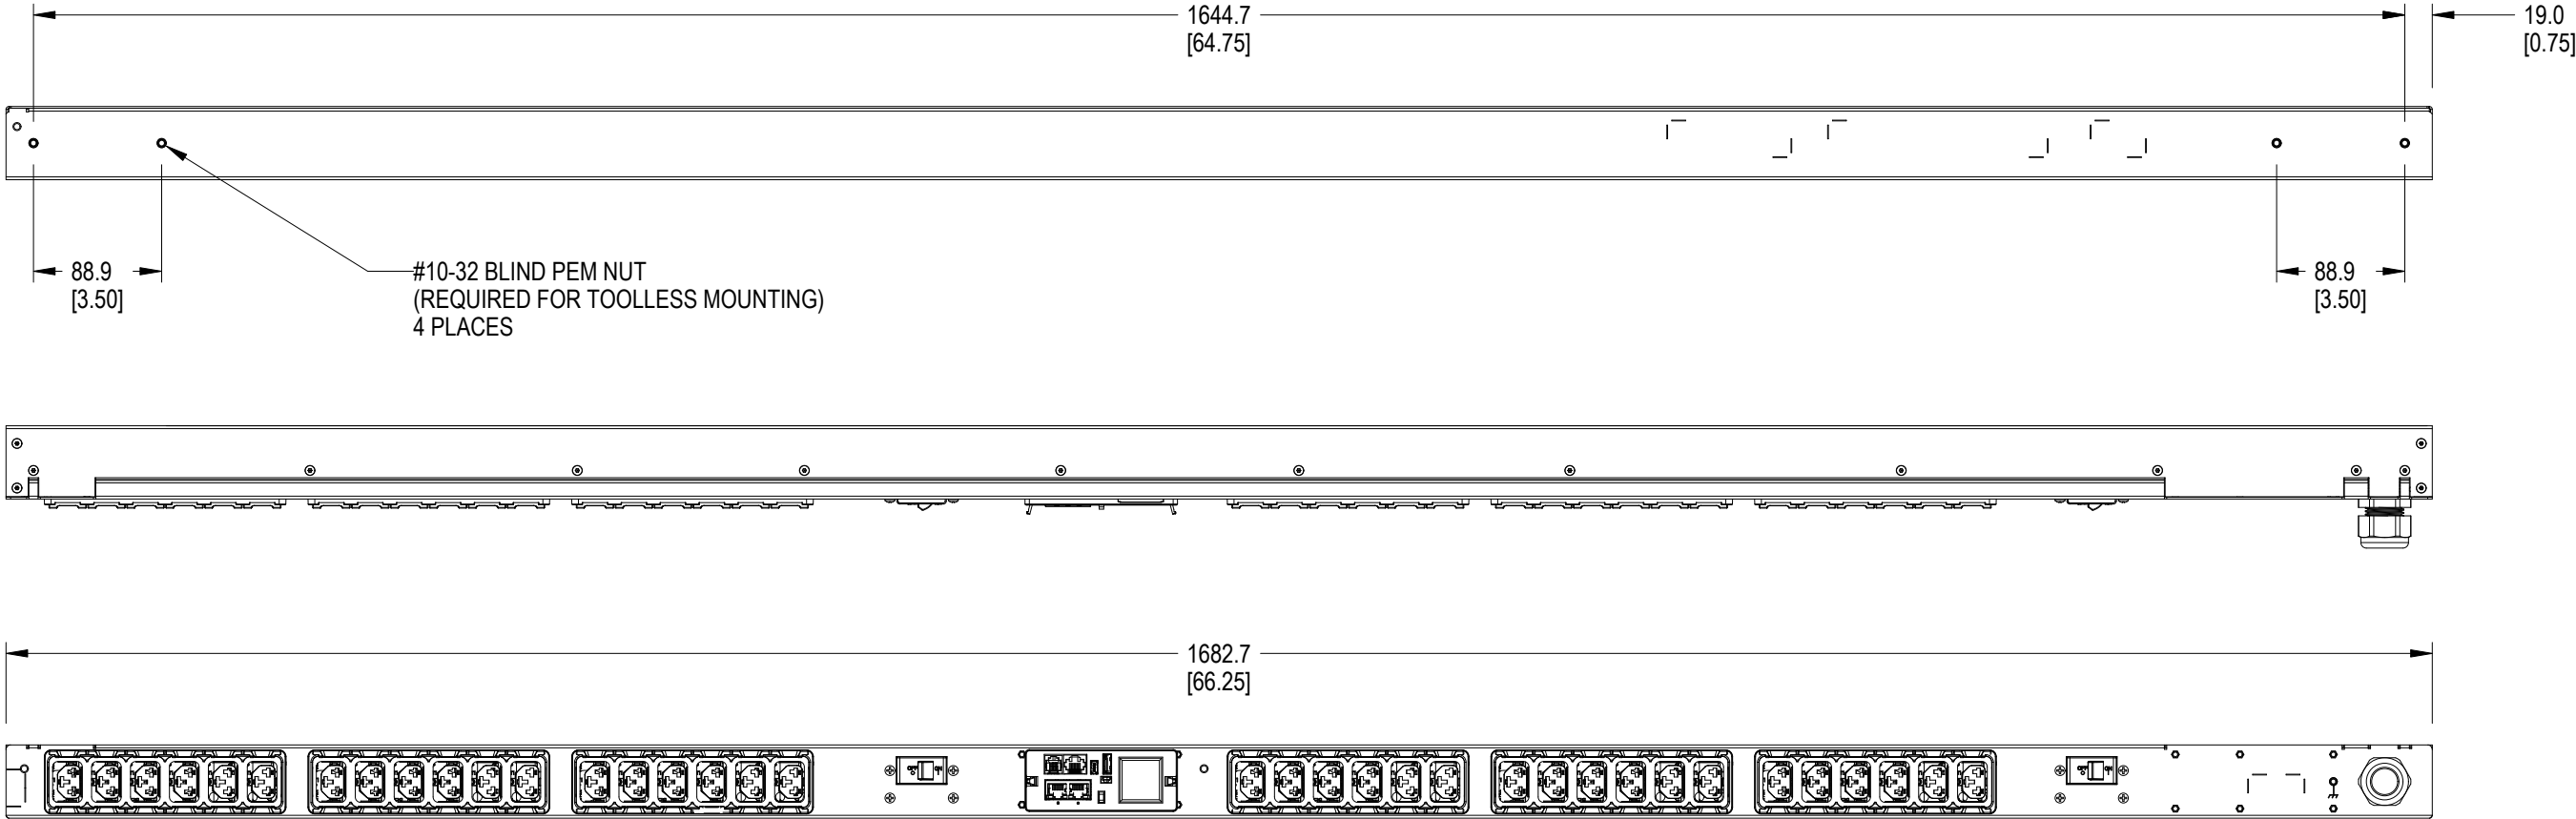

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	18x Combination C13/C19	200-240V	12/16	16
2	18x Combination C13/C19	200-240V	12/16	16

INPUT POWER




INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft	NEMA L6-30P	2/PE	50/60	200-240V	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% - Circuit/Breaker Current

AGENCY COMPLIANCE:
RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C/140F

NOTES:
UNIT DIMENSIONS: 66.25in x 2in x 2in / 1683mm x 51mm x 51mm
Shipped Weight: 16lbs (7.26kg)
Mounting Hardware: 7938 Vertical Mounting Bracket Kit; Toolless Mounting Hardware
Center to Center Spacing: 61.25in and 64.75in / 1556mm and 1645mm

		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521		VP4N30AM		rPDU, Monitored Unit Level EC, 30A, 208V, 4.9kW, Vertical, (36) Combination C13/C19, 10ft power cord with L6-30P, Black Powder Coat					
CORPORATE CAGE CODE 1EDC2		505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082				PART NUMBER		DESCRIPTION			
© 2025 VERTIV GROUP CORP. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORP. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORP. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT, USE (EXCEPT SOLELY FOR THE BENEFIT OF VERTIV GROUP CORP.), SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORP., AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORP. IMMEDIATELY UPON REQUEST.											
MATERIAL:				UNLESS OTHERWISE SPECIFIED TOLERANCE		 VERTIV™		MN05M4B1-36CF18-3TL6A0 A10-S			
N/A		MM (PRIMARY)		INCHES (SECONDARY)							
X		±2.5		(X) ±.1							
X		±.75		(XX) ±.03							
XX		±.25		(XXX) ±.01							
FINISH:				HOLE DIA		HOLE DIA		±.003			
N/A		ANGULAR		±.2°							
DESIGNED BY: CARLOS ARROYO				DATE: 2025-11-04		WEIGHT: -		C  CONTROL CHARACTERISTICS			
DRAWN BY: CARLOS ARROYO				DATE: 2025-11-04		SHEET: 1/1		THIRD ANGLE PROJECTION 		SIZE B	
								SCALE 1:5		DOCUMENT NUMBER VP4N30AM	