Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.

REAR VIEW

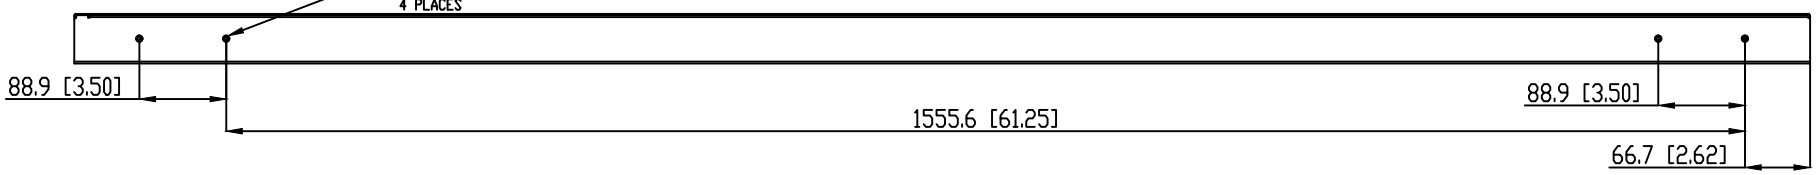

SIDE VIEW

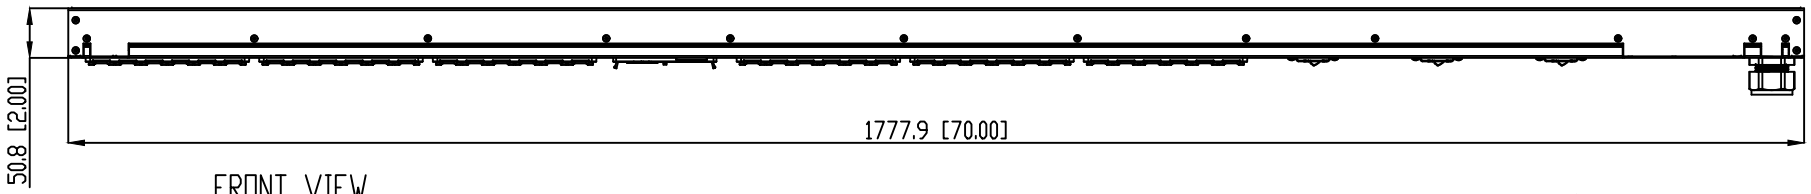

FRONT VIEW

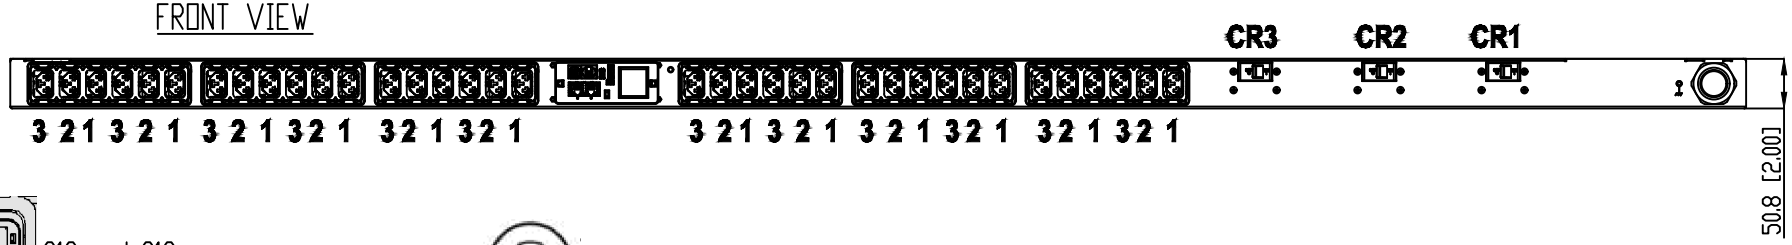



C13 and C19
COMNINATION OUTLET

L21-30P

AGENCY COMPLIANCE:
RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C / 140F

NOTES :
UNIT DIMENSIONS: 70in x 2in x 2in / 1778mm x 51mm x 51mm
Shipped Weight: 17lbs (7.71kg)
Mounting Hardware: 7938 Vertical Mounting Bracket Kit; Toolless Mounting Hardware - Center to Center Spacing: 61.25in-64.75in / 1556mm and 1645mm

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	12x Combination C13/C19	200-240V	12/16	16
2	12x Combination C13/C19	200-240V	12/16	16
3	12x Combination C13/C19	200-240V	12/16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS	MAX. CONT. AMPS (A)
10ft / 3m	NEMA L21-30P	3/N/PE	50/60	100-120V/200-240V WYE	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% - Circuit/Breaker Current

Dimensions in mm

Rev.	Change	Date	Name
-	-	-	-

Allgemeintoleranzen
General tolerances
–

Oberfläche
Finish
–

Verkstoff / Material
–

Gewicht:
Weight:
–

	Date	Name
Drawn	11/21/25	SV
Checked	-	-
Approved	–	–

Bezeichnung / Description
rPDU, Monitored Unit Level EC, 30A, 120/208V WYE, 8.6kW, Vertical, (36) Combination C13/C19, 10ft power cord with L21-30P, Black Powder Coat.

VERTIV™

Zeichnungs-Nr. / Drawing no.
VP4N30AN -- MN05M4W1-36CF18-3TL21A0A10-S-A

Maßstab
Scale
1:5

Verwendet in / Used in
–

Blatt/Sheet
1/1