


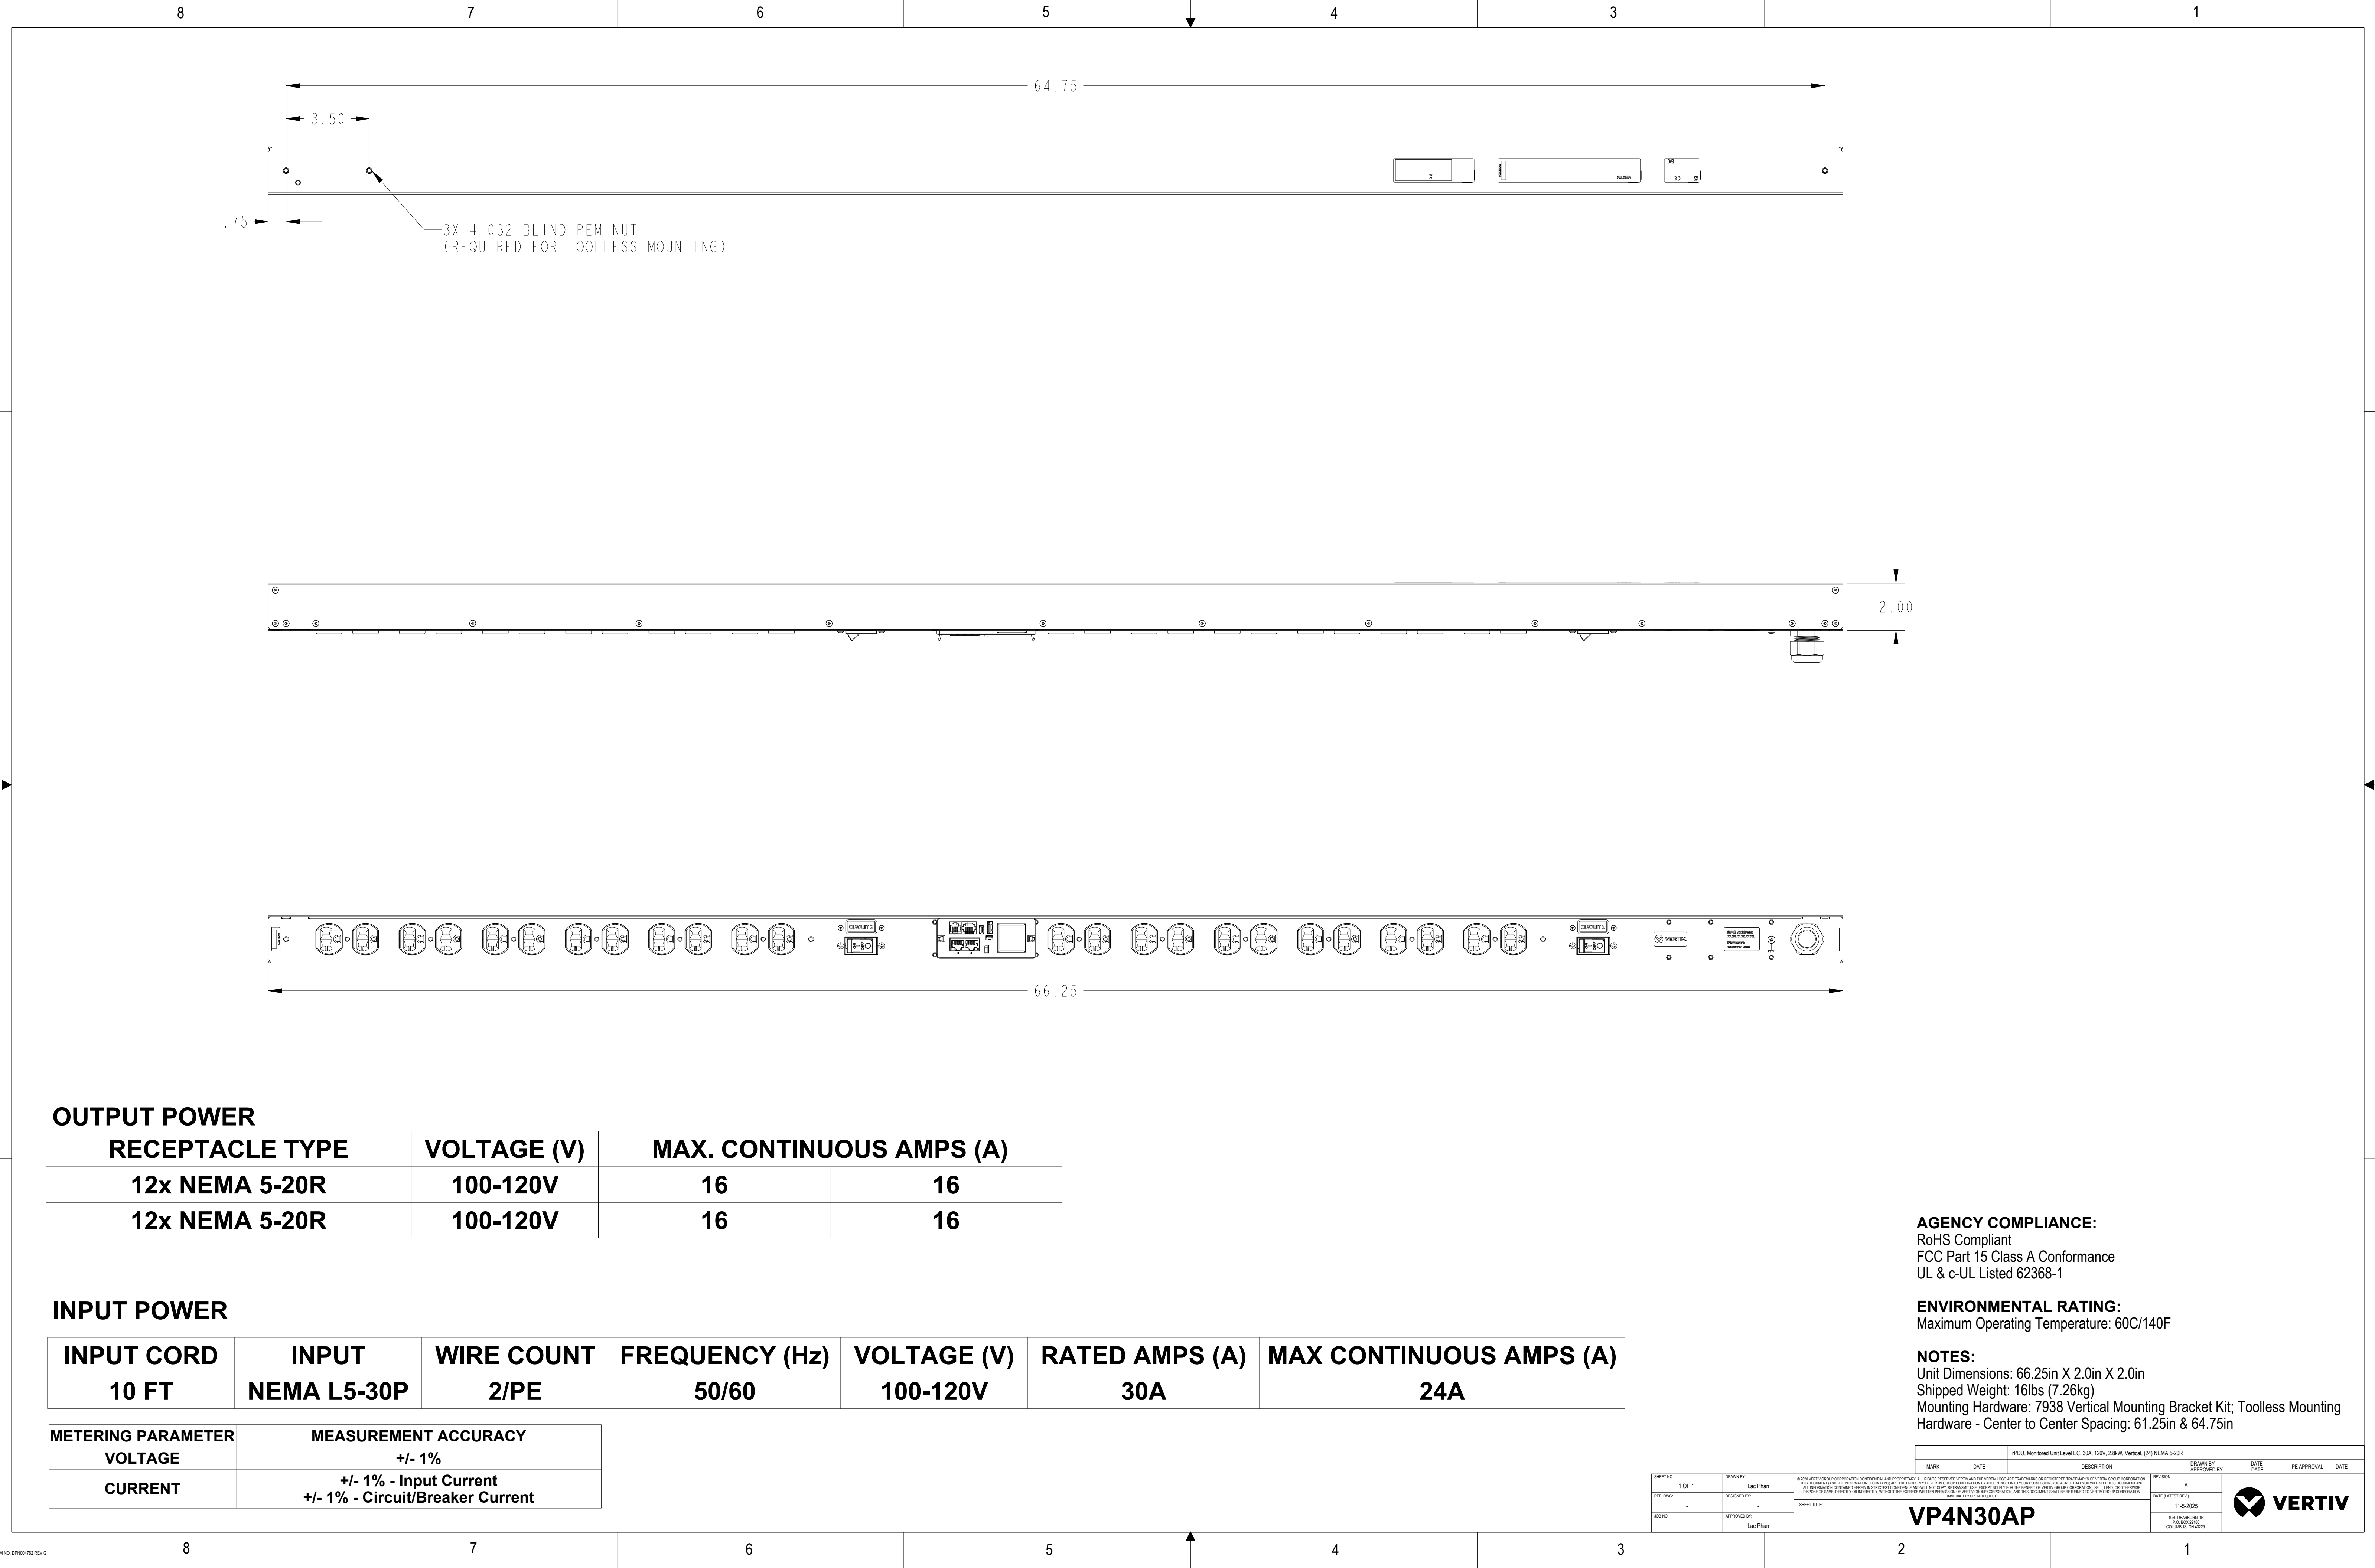

OUTPUT POWER

RECEPTACLE TYPE	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
12x NEMA 5-20R	100-120V	16	16
12x NEMA 5-20R	100-120V	16	16

INPUT POWER

INPUT CORD	INPUT	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX CONTINUOUS AMPS (A)
10 FT	NEMA L5-30P	2/PE	50/60	100-120V	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	+/- 1%
CURRENT	+/- 1% - Input Current +/- 1% - Circuit/Breaker Current

AGENCY COMPLIANCE:
RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C/140F

NOTES:
Unit Dimensions: 66.25in X 2.0in X 2.0in
Shipped Weight: 16lbs (7.26kg)
Mounting Hardware: 7938 Vertical Mounting Bracket Kit; Toolless Mounting Hardware - Center to Center Spacing: 61.25in & 64.75in

MARK	DATE	iPDU, Monitored Unit Level EC, 30A, 120V, 2-BkW, Vertical, (24) NEMA 5-20R		REVISION	DATE	DATE	DATE
SHEET NO. 1 OF 1		DRAWN BY: Lac Phan		DRAWN BY APPROVED BY		DATE	
REF. DWG.		DESIGNED BY:		DATE		DATE	
JOB NO.		APPROVED BY: Lac Phan		DATE		DATE	

© 2023 VERTIV GROUP CORPORATION. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION. THIS DOCUMENT AND THE INFORMATION IT CONTAINS ARE THE PROPERTY OF VERTIV GROUP CORPORATION. NO PART OF THIS DOCUMENT SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF VERTIV GROUP CORPORATION. THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMMEDIATELY UPON REQUEST.

SHEET TITLE:
VP4N30AP

11-5-2025

11-5-2025

11-5-2025

VERTIV