


4

3

2

1

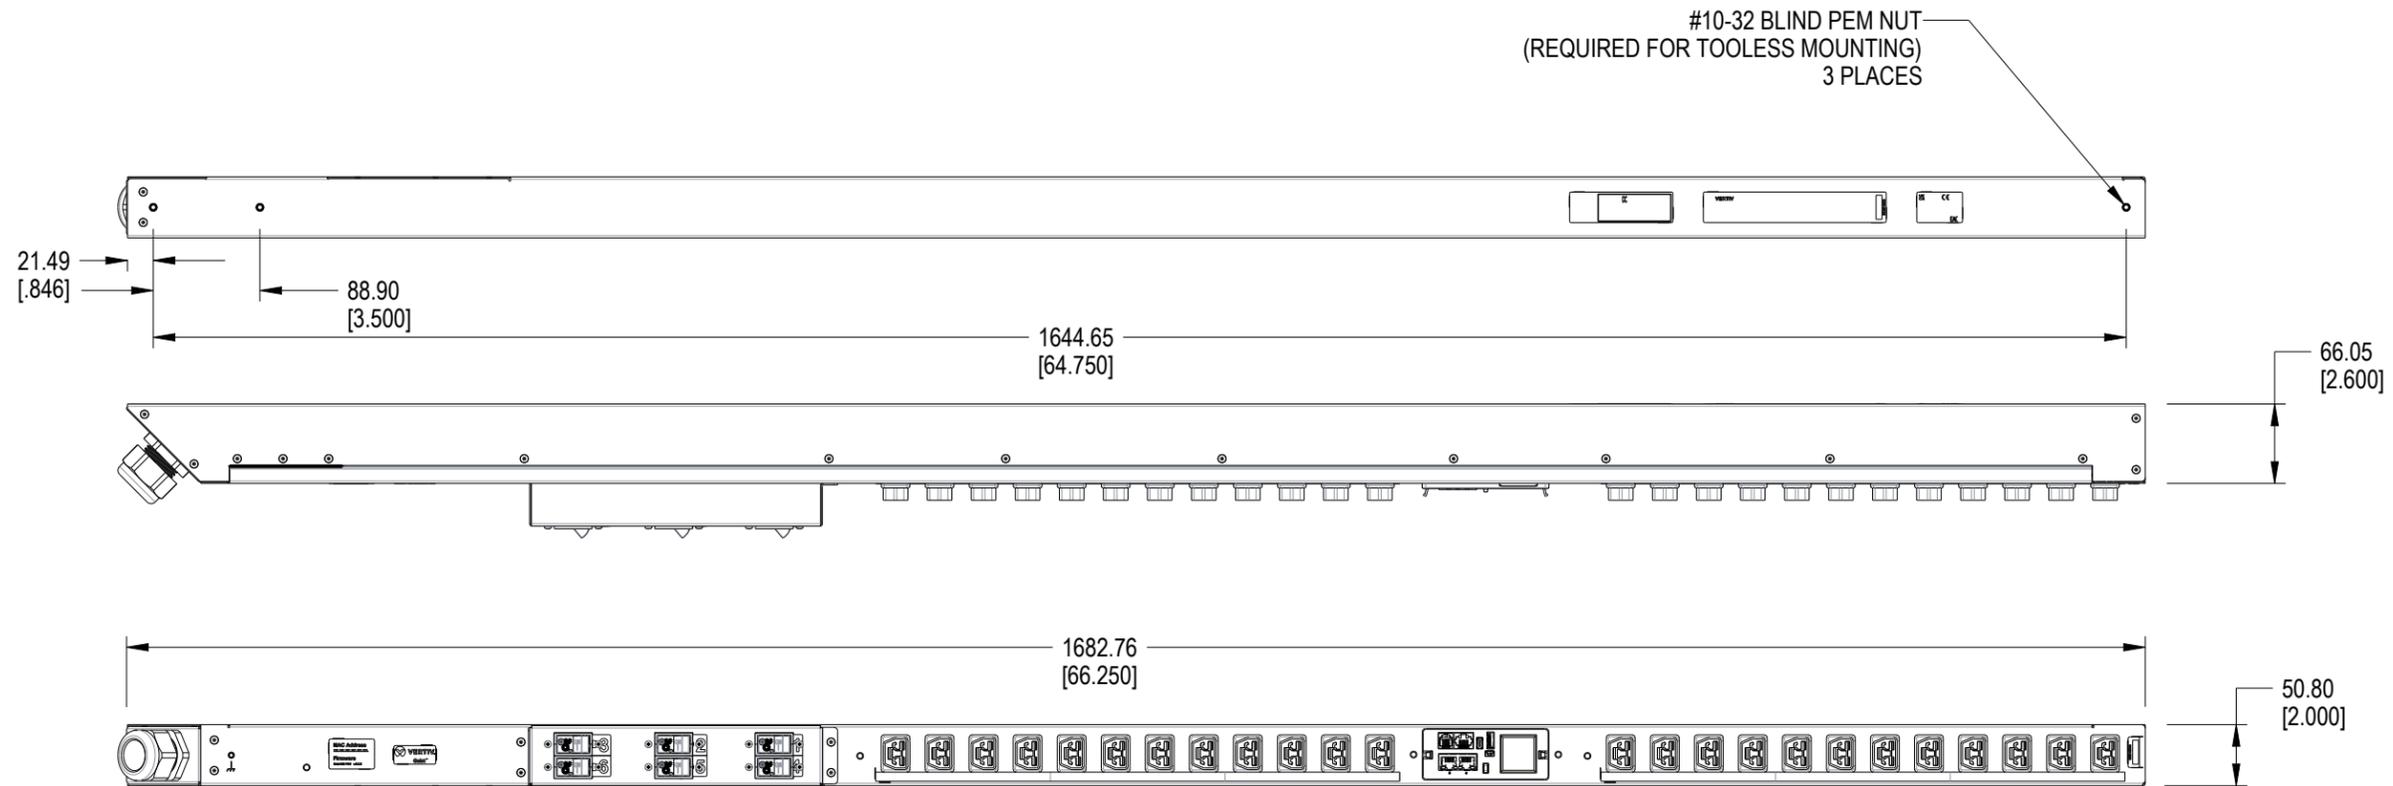

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	4xSDG400	277	16	16
2	B	4xSDG400	277	16	16
3	C	4xSDG400	277	16	16
4	A	4xSDG400	277	16	16
5	B	4xSDG400	277	16	16
6	C	4xSDG400	277	16	16

NEMA L22-30P



AGENCY COMPLIANCE:
 ETL & c-ETL Listed to UL 62368-1
 RoHS Compliant
 FCC Part 15 Class A Conformance

ENVIRONMENTAL RATING:
 Maximum Operating Temperature: 60C / 140F

NOTES
 UNIT DIMENSIONS: 66.25in x 2in x 2.6in / 1683mm x 51mm x 66mm
 SHIPPED WEIGHT: 30lbs (13.61kg)
 SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
 Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft	NEMA L22-30P	3/N/PE	50/60	277/480V WYE	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% - Circuit/Breaker Current

CORPORATE CAGE CODE 1EDC2		VERTIV 1777 YOLANDE AVENUE LINCOLN, NEBRASKA 68521		VP4N30AU		VP4N30AU-ASM																					
		505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082		PART NUMBER		DESCRIPTION																					
<small>© 2025 VERTIV GROUP CORP. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED. VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORP. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORP. BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT, REPRODUCE, OR DISCLOSE FOR THE BENEFIT OF VERTIV GROUP CORP., SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORP., AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORP. IMMEDIATELY UPON REQUEST.</small>																											
MATERIAL: N/A				UNLESS OTHERWISE SPECIFIED TOLERANCE: MM (PRIMARY) INCHES (SECONDARY)																							
FINISH: N/A				<table border="1"> <tr> <td>X</td> <td>±.25</td> <td>(X)</td> <td>±.1</td> </tr> <tr> <td>.X</td> <td>±.75</td> <td>(.XX)</td> <td>±.03</td> </tr> <tr> <td>.XX</td> <td>±.25</td> <td>(.XXX)</td> <td>±.01</td> </tr> <tr> <td>HOLE DIA</td> <td>+.08</td> <td>HOLE DIA</td> <td>+.003</td> </tr> <tr> <td>ANGULAR</td> <td colspan="3">±2°</td> </tr> </table>				X	±.25	(X)	±.1	.X	±.75	(.XX)	±.03	.XX	±.25	(.XXX)	±.01	HOLE DIA	+.08	HOLE DIA	+.003	ANGULAR	±2°		
X	±.25	(X)	±.1																								
.X	±.75	(.XX)	±.03																								
.XX	±.25	(.XXX)	±.01																								
HOLE DIA	+.08	HOLE DIA	+.003																								
ANGULAR	±2°																										
DESIGNED BY: JEFF MICEK		DATE: 2026-02-17		WEIGHT: -		CONTROL CHARACTERISTICS																					
DRAWN BY: JEFF MICEK		DATE: 2026-02-17		SHEET: 1/1		THIRD ANGLE PROJECTION 																					
				SIZE B		SCALE 1:6																					
				PART DESCRIPTION VP4N30AU-ASM		DOCUMENT NUMBER VP4N30AU																					

4

3

2

1