



CO NO	REV	DESCRIPTION	DRAWN BY: APPROVED BY: DATE DATE


REAR VIEW

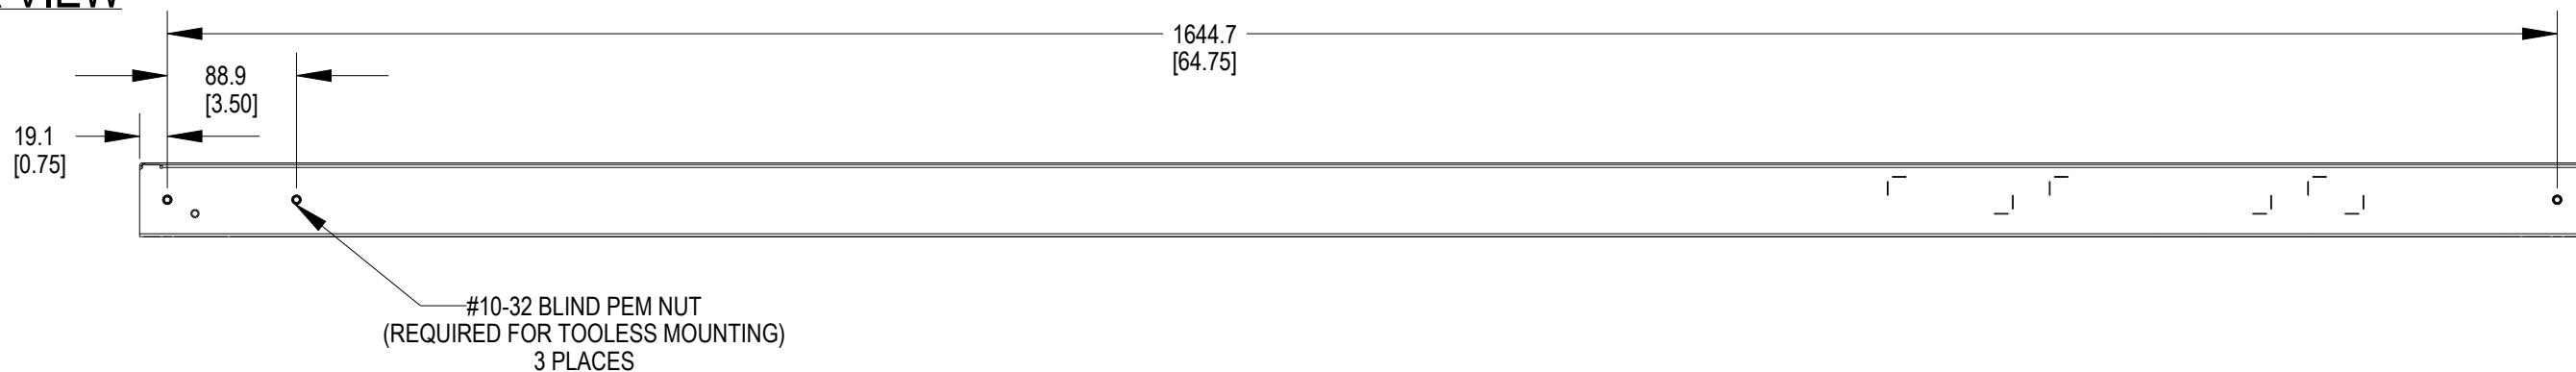

UPPER VIEW

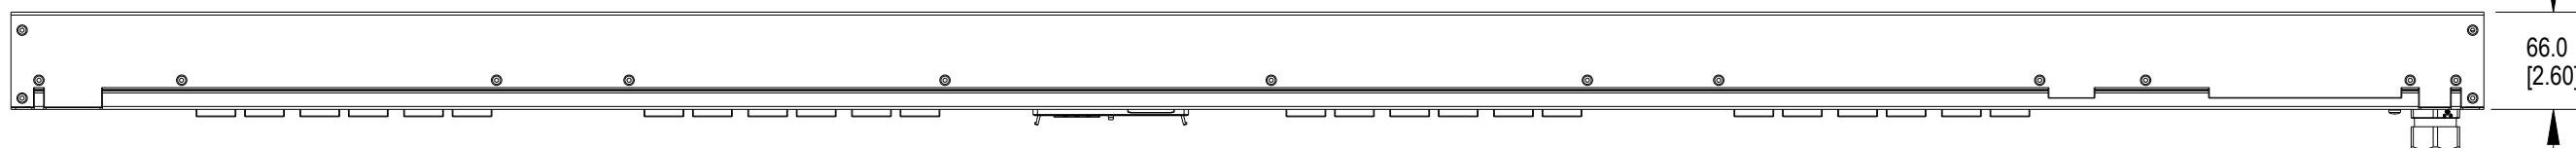

FRONT VIEW

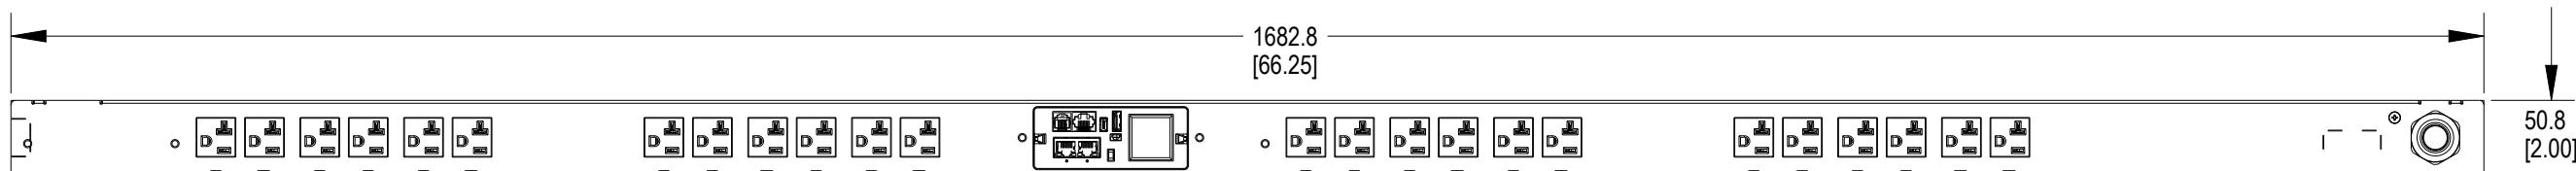

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	24x NEMA 5-20R	100-120V	16	16

INPUT POWER

INPUT CORD	INPUT	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 FT	NEMA L5-20P	2/PE	50/60	100-120V	20A	16 A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current

AGENCY COMPLIANCE:
RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1



L5-20P

ENVIRONMENTAL RATING:
Maximum Operating Temperature: 60C/140F

NOTES
UNIT DIMENSIONS: 66.25in x 2in x 2.6in
Shipped Weight: 18lbs (8.16kg)
Mounting Hardware: 7938 Vertical Mounting Bracket Kit;
Toolless Mounting Hardware - Center to Center Spacing: 61.25in and 64.75in

VERTIV
1777 YOLANDE AVENUE
LINCOLN, NEBRASKA 68521

CORPORATE CAGE CODE	505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082	PART NUMBER	DESCRIPTION
1EDC2			

© 2025 VERTIV GROUP CORP. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.
BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT, USE (EXCEPT SOLELY FOR THE BENEFIT OF VERTIV GROUP CORP.), SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORP., AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORP. IMMEDIATELY UPON REQUEST.

MATERIAL:	UNLESS OTHERWISE SPECIFIED TOLERANCE	
	MM (PRIMARY)	INCHES (SECONDARY)
18 GAUGE STEEL OR METRIC EQUIVALENT	X ± 2.5	(X) $\pm .1$
FINISH:	X $\pm .75$	(XX) $\pm .03$
BLACK WRINKLE POWDER	XX $\pm .25$	(XXX) $\pm .01$
	HOLE DIA $\pm .08$	HOLE DIA $\pm .003$
	ANGULAR	$\pm 2^\circ$
DESIGNED BY:	DATE:	WEIGHT:
JJC	2025-12-01	-
DRAWN BY:	DATE:	SHEET:
JJC	2025-12-01	1/1
THIRD ANGLE PROJECTION	SIZE:	SCALE:
	B	1:5
DOCUMENT NUMBER	REV:	
VP5N20A4		2

