



REAR VIEW



SIDE VIEW

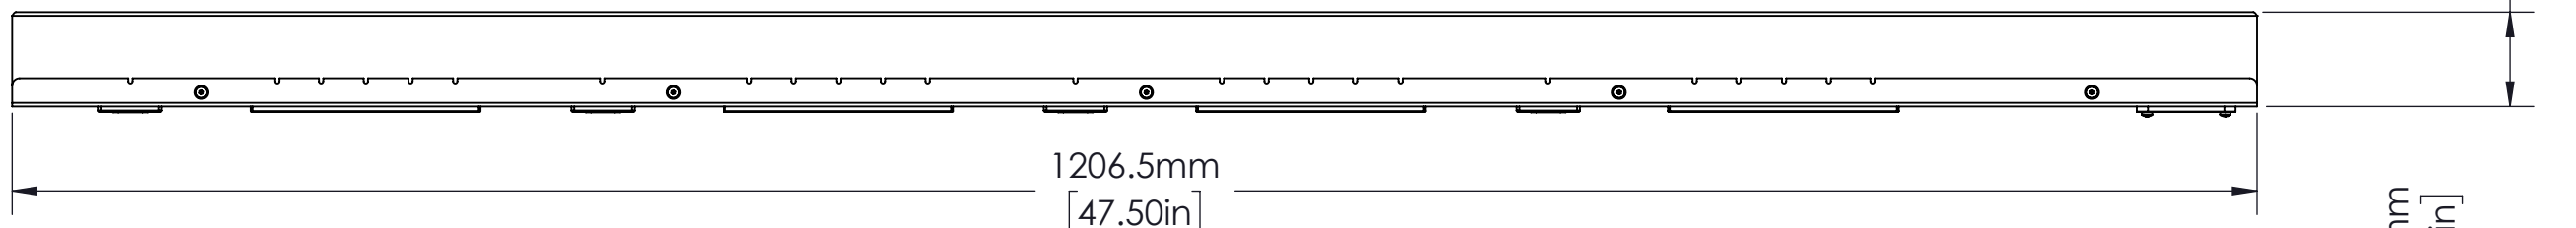

FRONT VIEW

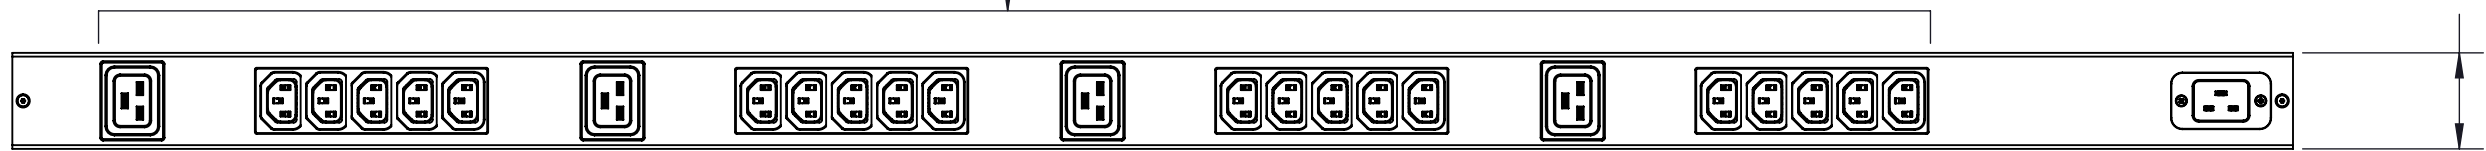

AGENCY COMPLIANCE:
 CE Marked
 RoHS Compliant
 Complies with EN 55032 and EN 55024
 Complies with IEC 60950-1 (CB Certificate Available)

ENVIRONMENTAL RATING:
 Continuous Operating Temperature Range: 10-45C / 50-113F

NOTES
 UNIT DIMENSIONS: 47.5in x 2.0in x 2.0in / 1207mm x 51mm x 51mm
 SHIPPED WEIGHT: 8lbs (3.63kg)
 SHIPPING DIMENSIONS: 50in x 5in x 3in / 1270mm x 127mm x 77mm
 Toolless Mounting Hardware 36.75in / 933.45mm, and 7938 Vertical Mounting Bracket Kit

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	L1	20xC13, 4xC19	100-240	10/16	16

INPUT POWER

INPUT CORD	INPUT SOCKET	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
NONE	IEC 60320 C20	1/N/PE, 2/PE	50/60	100-240	16	16

		Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: Weight: -	
		-		-		-		-	
Dimensions in mm		Drawn	Date		Name		Bezeichnung / Description		
		Checked	20/09/18		SW		Basic, Vertical, 16A, 230V, (20) C13 / (4) C19		
		Approved	-		-				
		Zeichnungs-Nr. / Drawing no.				Maßstab Scale			
		VP7552				1:4			
Rev.	Change	Date	Name	Verwendet in / Used in				Blatt/Sheet	
-	-	-	-	-				1/1	

Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.