

D

C

B




A

D

C

B

A

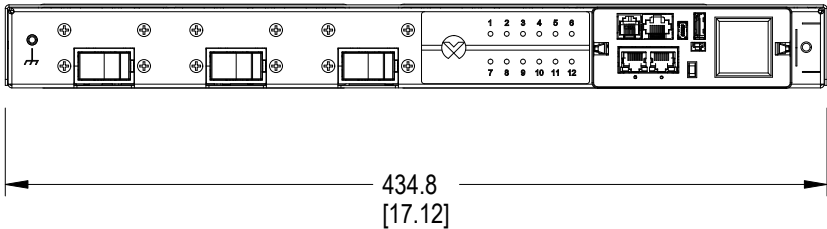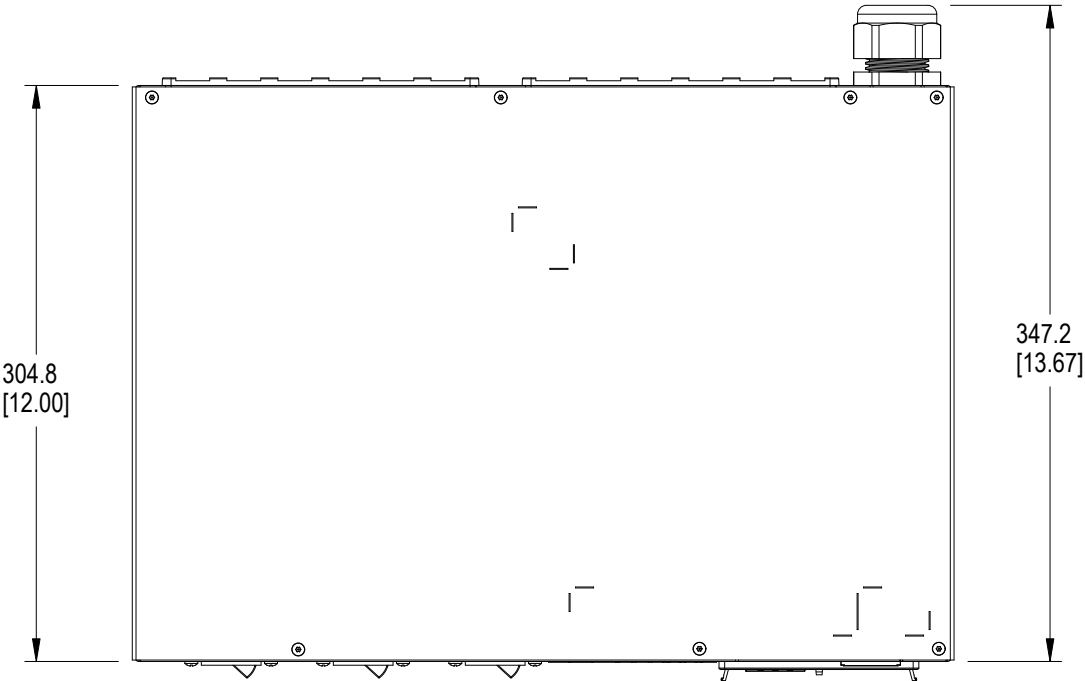

OUTPUT POWER

CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
			PER RECEPTACLE	PER CIRCUIT
1	4x Combination C13/C19	200-240	16-Dec	16
2	4x Combination C13/C19	200-240	16-Dec	16
3	4x Combination C13/C19	200-240	16-Dec	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10ft/3m	NEMA L15-30P Twistlock	3/PE	50/60	200-240	30A	24A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% - Circuit/Breaker Current



L15-30P

AGENCY COMPLIANCE:





RoHS Compliant
FCC Part 15 Class A Conformance
UL & c-UL Listed 62368-1

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 60C/140F

NOTES

UNIT DIMENSIONS: 1.72in x 17in x 12in / 44mm x 432mm x 305mm
SHIPPED WEIGHT: 18lbs (8.16kg)
Mounting Hardware: 8074 Adjustable Mount Brackets

<div>CORPORATE CAGE CODE</div> <div>1EDC2</div>		<div>VERTIV</div> <div>1777 YOLANDE AVENUE</div> <div>LINCOLN, NEBRASKA 68521</div>	<div>VP7N31A3</div>		<div>rPDU, Switched Outlet Level Monitoring EC, 30A,</div> <div>208V DELTA, 8.6kW, Horizontal, (12) Combination</div> <div>C13/C19, 10ft / 3m power cord with L15-30P, Black</div> <div>Powder Coat</div>																									
		<div>505 N. CLEVELAND AVE</div> <div>WESTERVILLE, OHIO 43082</div>	<div>PART NUMBER</div>	<div>DESCRIPTION</div>																										
<div>© 2025 VERTIV GROUP CORP. CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.</div> <div>VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORP. THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORP.</div> <div>BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND ALL INFORMATION CONTAINED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT, USE (EXCEPT SOLELY</div> <div>FOR THE BENEFIT OF VERTIV GROUP CORP.), SELL, LEND, OR OTHERWISE DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORP., AND THIS DOCUMENT SHALL BE</div> <div>RETURNED TO VERTIV GROUP CORP. IMMEDIATELY UPON REQUEST.</div>																														
<div>MATERIAL:</div> <div>N/A</div>			<div>UNLESS OTHERWISE SPECIFIED TOLERANCE</div> <table><tr><td colspan="2">MM (PRIMARY)</td><td colspan="2">INCHES (SECONDARY)</td></tr><tr><td>X</td><td>±2.5</td><td>(X)</td><td>±.1</td></tr><tr><td>X</td><td>±.75</td><td>(XX)</td><td>±.03</td></tr><tr><td>XX</td><td>±.25</td><td>(XXX)</td><td>±.01</td></tr><tr><td>HOLE DIA</td><td>±.08</td><td>HOLE DIA</td><td>±.003</td></tr><tr><td colspan="2">ANGULAR</td><td colspan="2">±.2°</td></tr></table>		MM (PRIMARY)		INCHES (SECONDARY)		X	±2.5	(X)	±.1	X	±.75	(XX)	±.03	XX	±.25	(XXX)	±.01	HOLE DIA	±.08	HOLE DIA	±.003	ANGULAR		±.2°		<div> VERTIV™</div>	
MM (PRIMARY)		INCHES (SECONDARY)																												
X	±2.5	(X)	±.1																											
X	±.75	(XX)	±.03																											
XX	±.25	(XXX)	±.01																											
HOLE DIA	±.08	HOLE DIA	±.003																											
ANGULAR		±.2°																												
<div>DESIGNED BY:</div> <div>CARLOS ARROYO</div>			<div>DATE:</div> <div>2025-10-10</div>		<div>WEIGHT:</div> <div>0.000</div>																									
<div>DRAWN BY:</div> <div>CARLOS ARROYO</div>			<div>DATE:</div> <div>2025-10-10</div>		<div>SHEET:</div> <div>1/1</div>																									
<div></div> <div>THIRD ANGLE PROJECTION</div>			<div></div> <div>SIZE B</div>		<div>SCALE</div> <div>1:4</div>																									
					<div>DOCUMENT NUMBER</div> <div>VP7N31A3</div>																									
			<div></div> <div>C</div> <div>CONTROL CHARACTERISTICS</div>		<div>MNU5MTR0-12CP18-3TL15</div> <div>A0H10-S</div>																									