


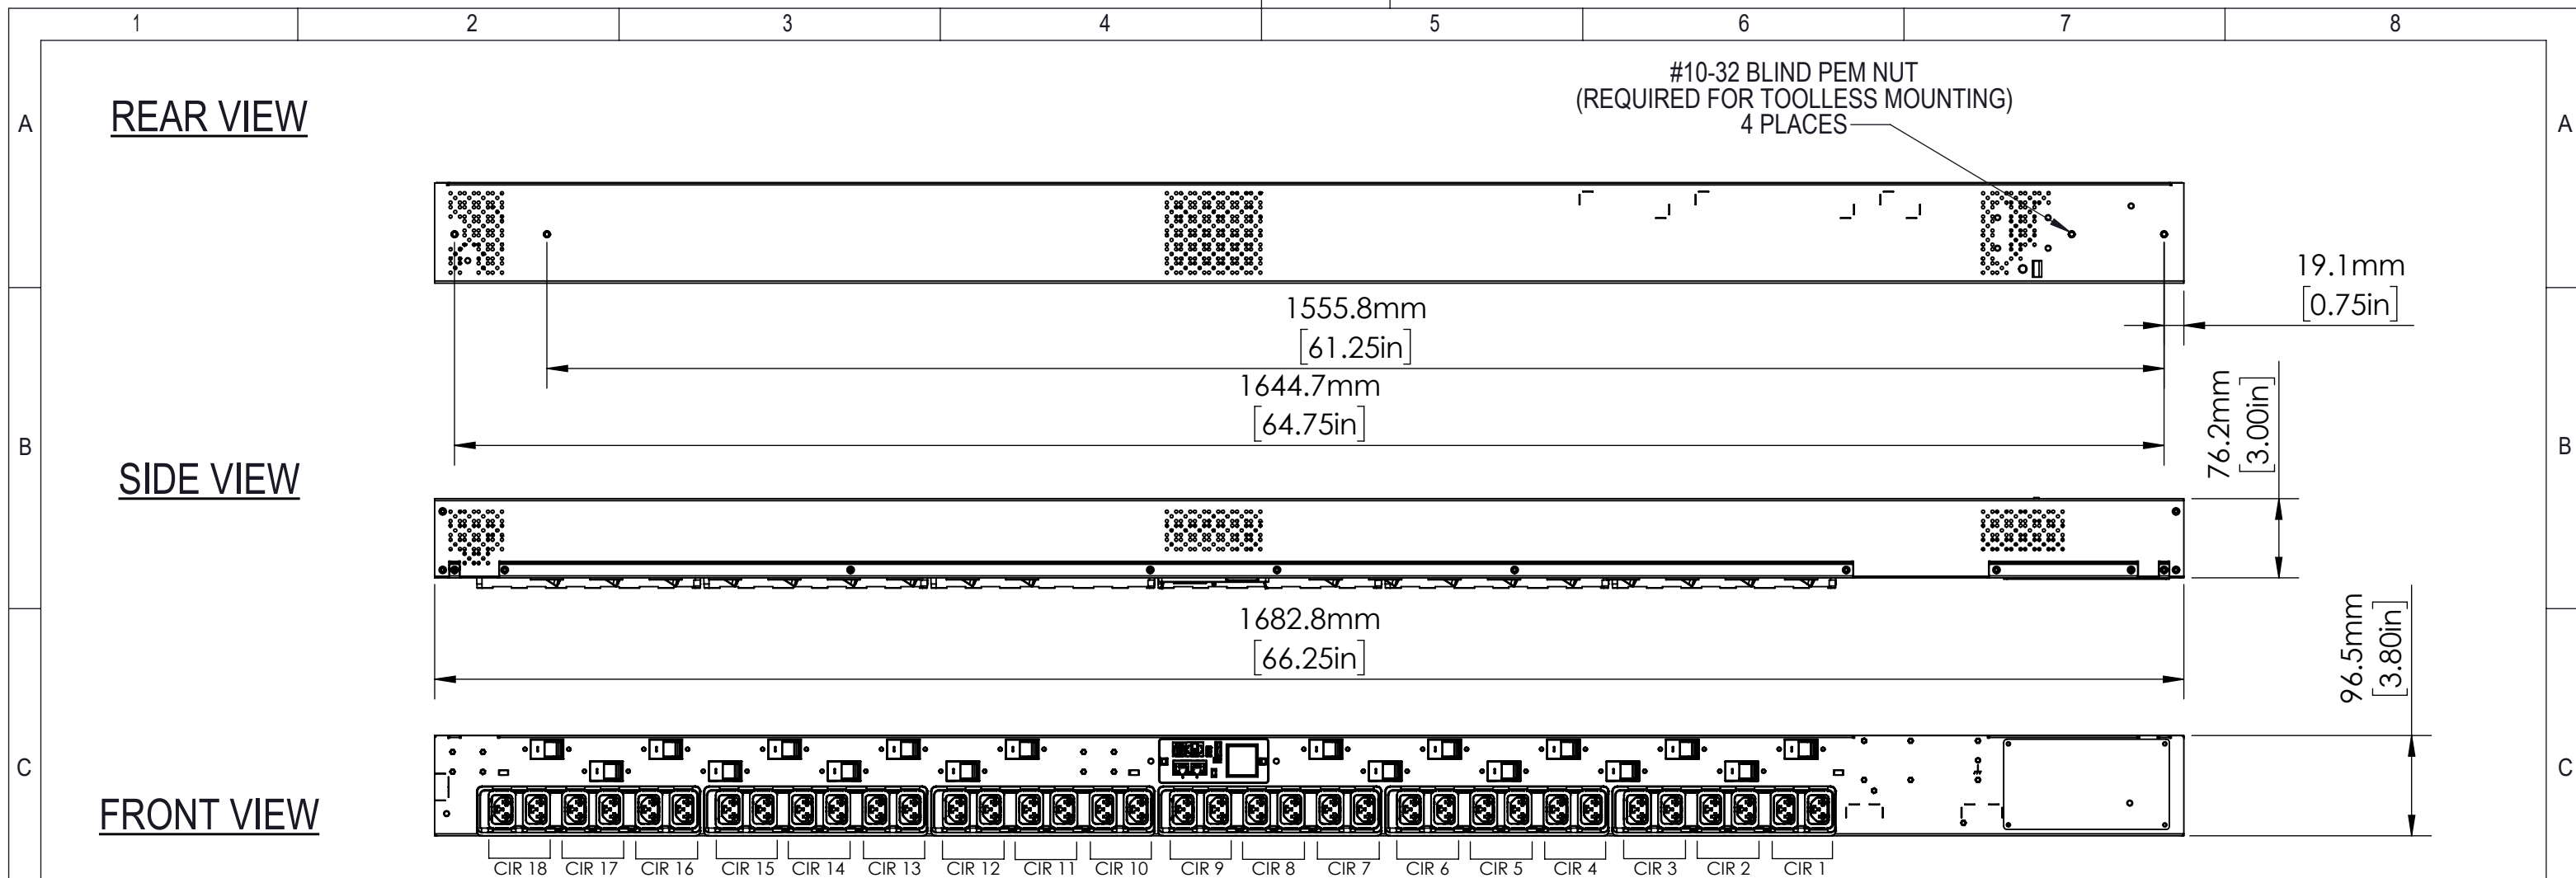

	OUTPUT POWER				
	CIRCUIT	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
	1	2x Combination C13/C19	200-240V	12/16	16
	2	2x Combination C13/C19	200-240V	12/16	16
	3	2x Combination C13/C19	200-240V	12/16	16
	4	2x Combination C13/C19	200-240V	12/16	16
	5	2x Combination C13/C19	200-240V	12/16	16
	6	2x Combination C13/C19	200-240V	12/16	16
	7	2x Combination C13/C19	200-240V	12/16	16
	8	2x Combination C13/C19	200-240V	12/16	16
	9	2x Combination C13/C19	200-240V	12/16	16
	10	2x Combination C13/C19	200-240V	12/16	16
	11	2x Combination C13/C19	200-240V	12/16	16
	12	2x Combination C13/C19	200-240V	12/16	16
	13	2x Combination C13/C19	200-240V	12/16	16
	14	2x Combination C13/C19	200-240V	12/16	16
	15	2x Combination C13/C19	200-240V	12/16	16
	16	2x Combination C13/C19	200-240V	12/16	16
	17	2x Combination C13/C19	200-240V	12/16	16
	18	2x Combination C13/C19	200-240V	12/16	16

AGENCY COMPLIANCE:

- RoHS Compliant
- FCC Part 15 Class A Conformance
- UL & c-UL Listed 62368-1
- China RoHS
- CE Marked
- UKCA Marked
- RCM Mark (EMC Only)

ENVIRONMENTAL RATING:

- Maximum Operating Temperature: 60C/140F

NOTES

- UNIT DIMENSIONS: 66.25in x 3.8in x 3.0in / 1683mm x 97mm x 76mm
- Shipped Weight: 22 lbs (9.98 kg)
- Mounting Hardware: 7938 Vertical Mounting Bracket Kit; Toolless Mounting Hardware - Center to Center

E

F

INPUT POWER

INPUT	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS	MAX. CONT. AMPS (A)
Hardwired - Removable Panel - Conduit Connection Access for Input and Output	3/N/PE	50/60	200-240/346-415V	80A	64A

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±1% - Circuit/Breaker Current

Dimensions in mm
