





REAR VIEW

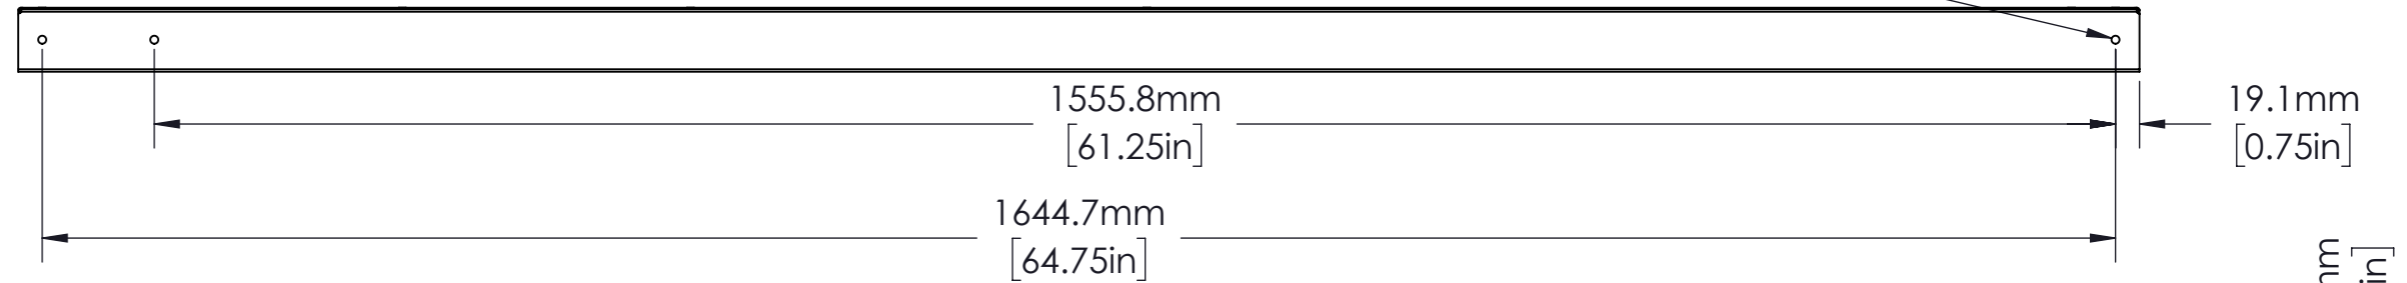

SIDE VIEW

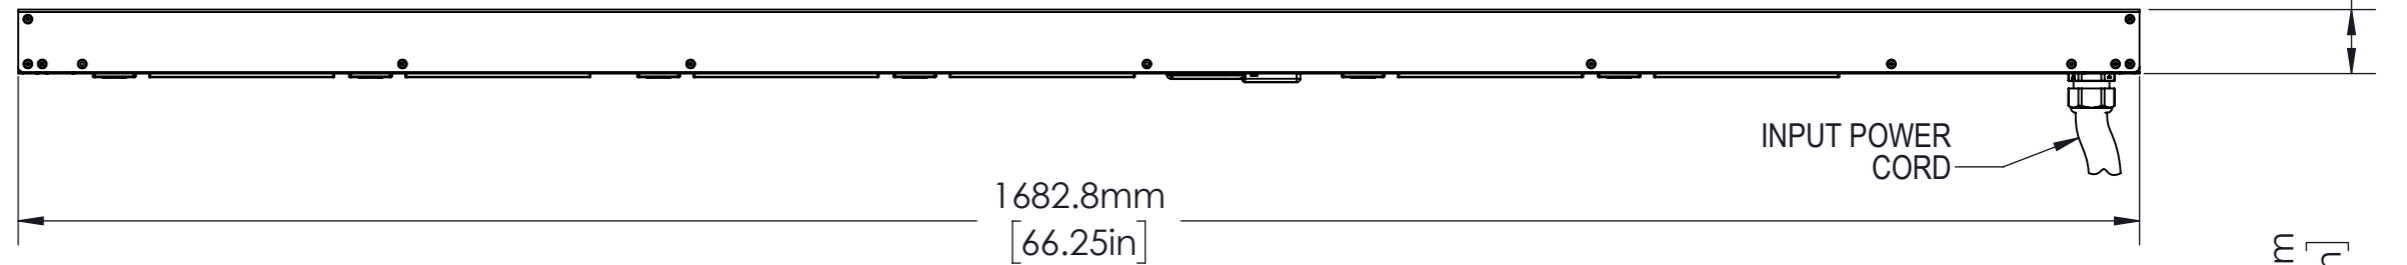

FRONT VIEW

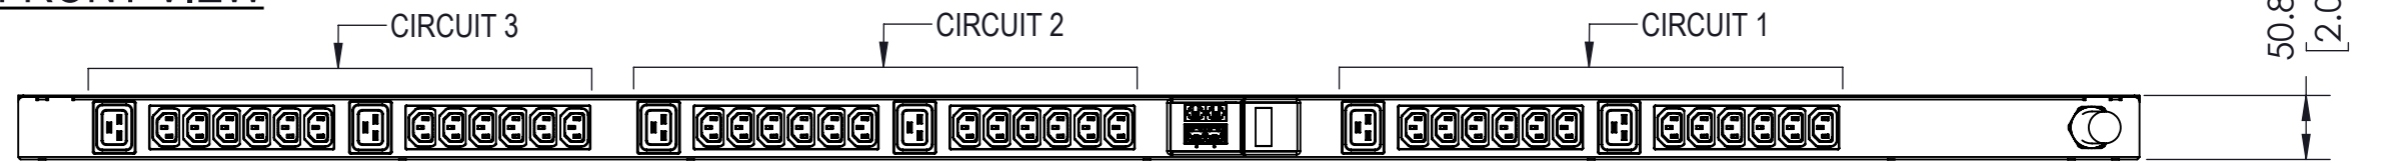

AGENCY COMPLIANCE:
 CE Marked
 RoHS Compliant
 Complies with EN 55032 and EN 55024
 Complies with IEC 60950-1 (CB Certificate Available)

ENVIRONMENTAL RATING:
 Maximum Operating Temperature: 60C / 140F

NOTES
 UNIT DIMENSIONS: 66.25in x 2.0in x 2.0in / 1683mm x 51mm x 51mm
 SHIPPED WEIGHT: 16lbs (7.26kg)
 SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
 Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm, and 7938 Vertical Mounting Bracket Kit

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	A	12xC13, 2xC19	200-240	10/16	16
2	B	12xC13, 2xC19	200-240	10/16	16
3	C	12xC13, 2xC19	200-240	10/16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
3m	IEC 60309 IP44	3/N/PE	50/60	200-240/346-415V WYE	16	16

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current

		Allgemeintoleranzen General tolerances -	Oberfläche Finish -	Werkstoff / Material -	Gewicht: Weight: -
Dimensions in mm		Date 07/09/18	Name SW	Bezeichnung / Description Monitored, Vertical, 16A, 230/400V WYE, (36) C13 / (6) C19	
Rev. Change Date Name		Drawn Checked Approved	Name SW - -	Zeichnungs-Nr. / Drawing no. VP8881	
				Verwendet in / Used in -	Maßstab Scale 1:6 Blatt/Sheet 1/1

Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.