



REAR VIEW

SIDE VIEW

FRONT VIEW

#10-32 BLIND PEM NUT
(REQUIRED FOR TOOLLESS MOUNTING)
3 PLACES

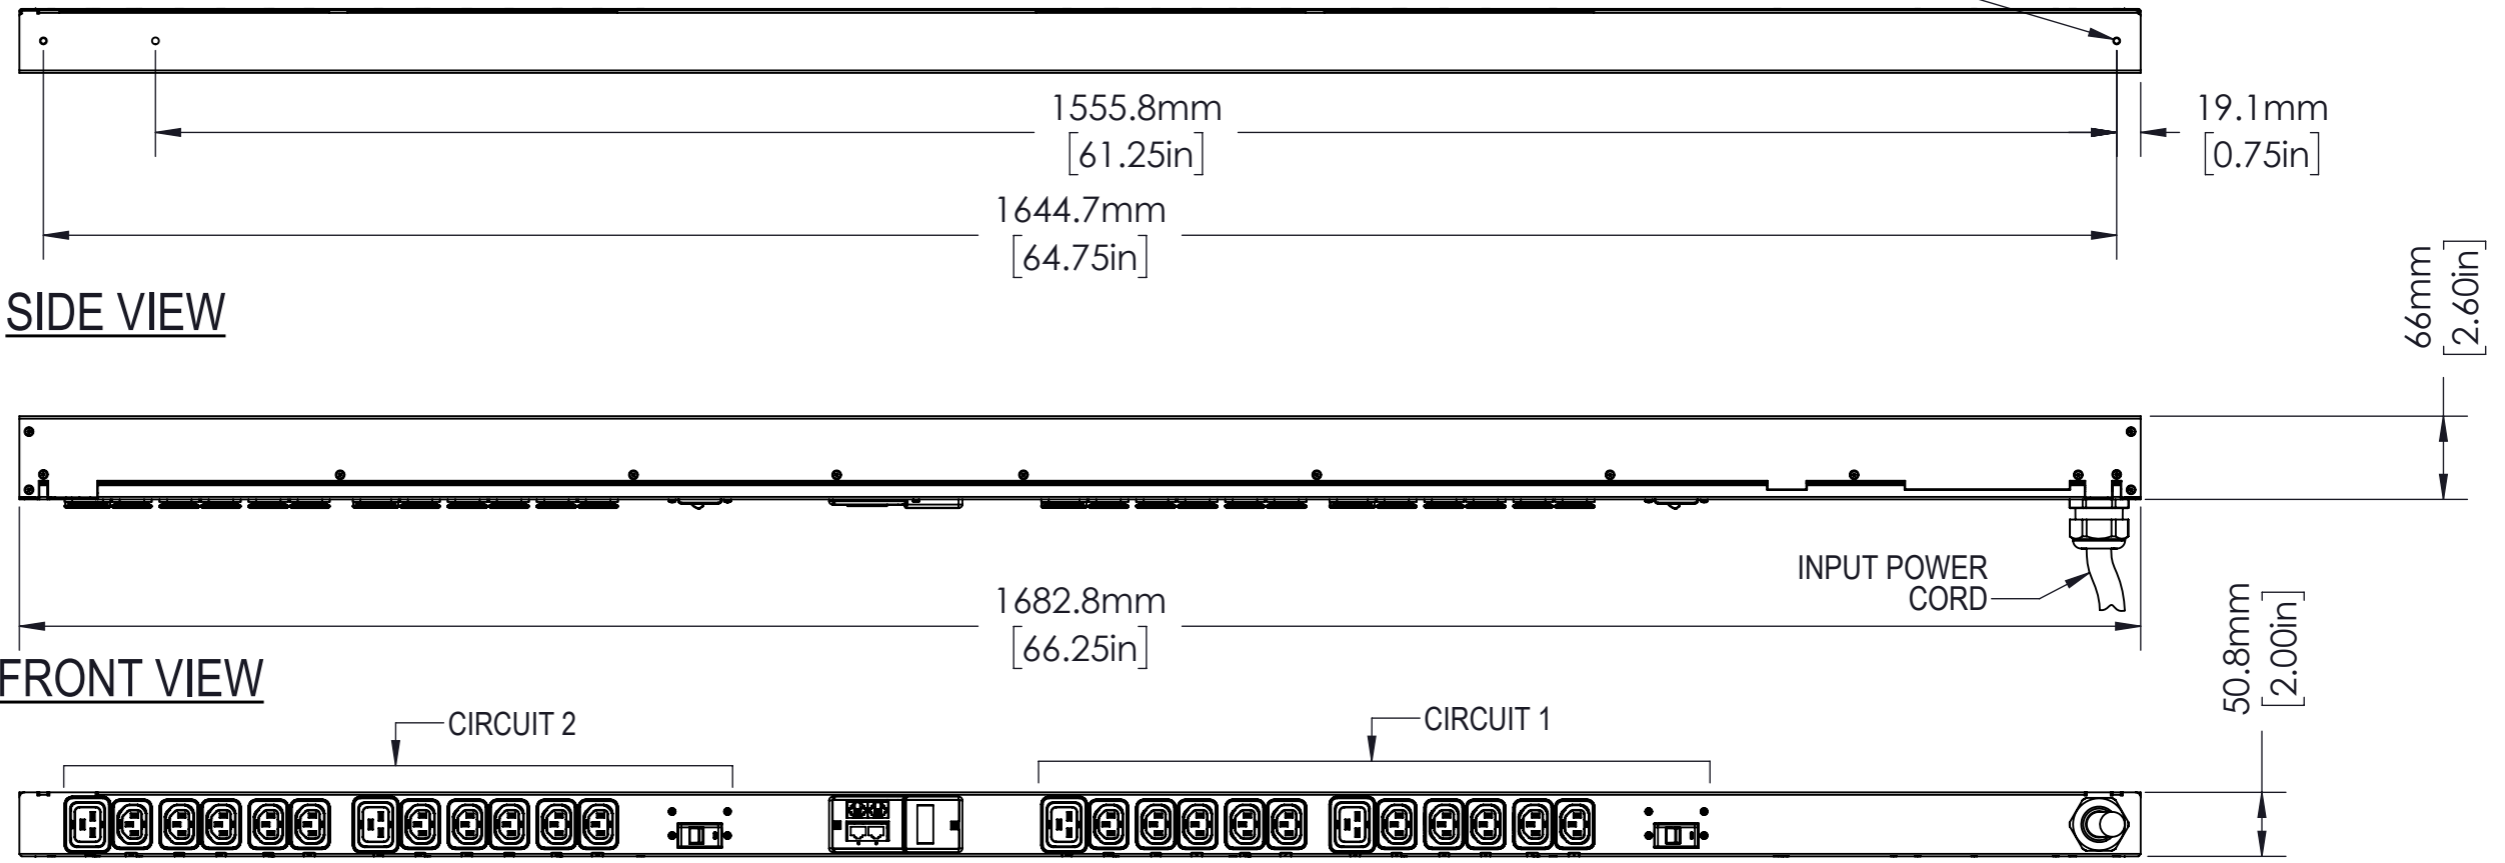

AGENCY COMPLIANCE:

- CE Marked
- RoHS Compliant
- Complies with EN 55032 and EN 55024
- Complies with IEC 60950-1 (CB Certificate Available)

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 50C / 122F

NOTES

- UNIT DIMENSIONS: 66.25in x 2.0in x 2.6in / 1683mm x 51mm x 66mm
- SHIPPED WEIGHT: 20lbs (9.07kg)
- SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
- Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm, and 7938 Vertical Mounting Bracket Kit

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	L1	10xC13, 2xC19	200-240	10/16	16
2	L1	10xC13, 2xC19	200-240	10/16	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
3m	IEC 60309 IP44	1/N/PE	50/60	200-240	32	32

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current
	±1% - Output Current
	±2% - Circuit/Breaker Current

<p>Dimensions in mm</p>		Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: Weight: -	
		-		-		-		-	
Rev.		Change		Date		Name		Bezeichnung / Description	
				7/09/18		SW		Switched, Outlet Level, Vertical, 32A, 230V, (20)U-Lock C13/(4)U-Lock C19	
				-		-		Zeichnungs-Nr. / Drawing no.	
				-		-		VP8953	
				-		-		Verwendet in / Used in	
				-		-		-	
				-		-		Maßstab Scale	
				-		-		1:6	
				-		-		Blatt/Sheet	
				-		-		1/1	



Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.