


REAR VIEW

SIDE VIEW

FRONT VIEW

#10-32 BLIND PEM NUT
(REQUIRED FOR TOOLLESS MOUNTING)
3 PLACES

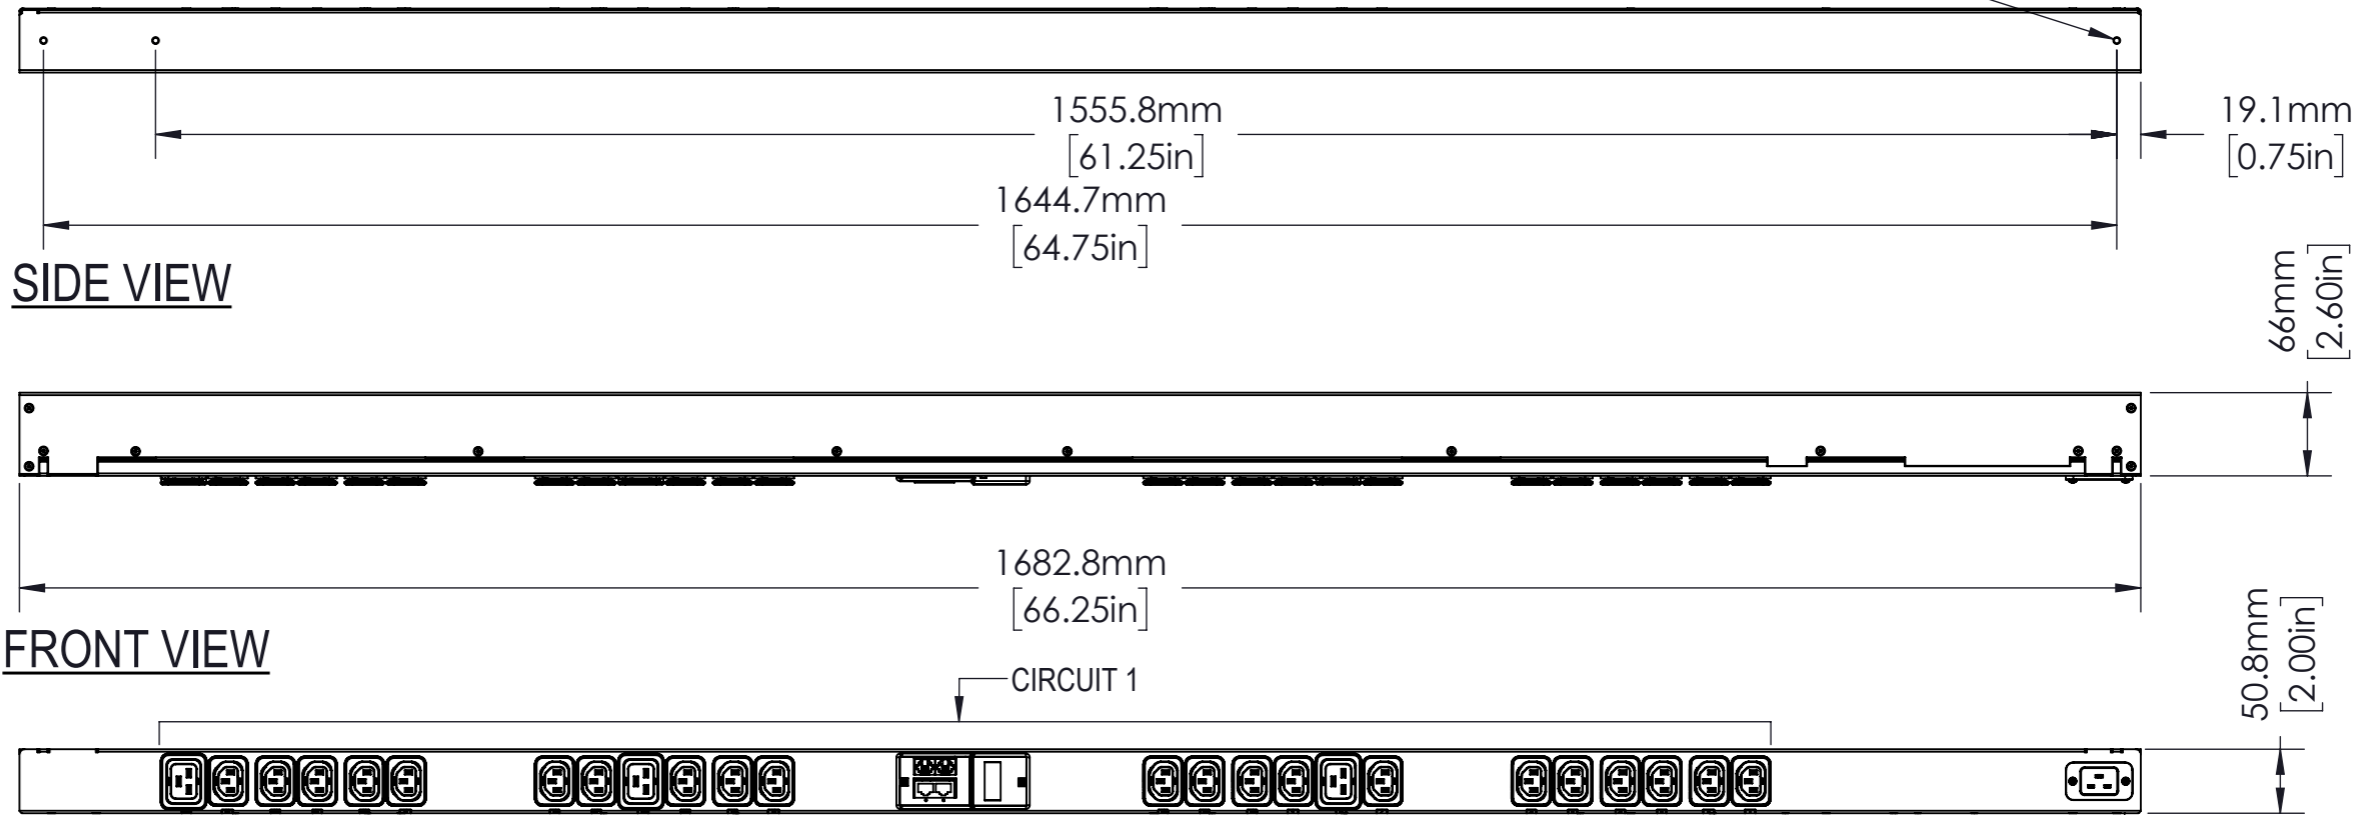

C20

AGENCY COMPLIANCE:

- CE Marked
- RoHS Compliant
- Complies with EN 55032 and EN 55024
- Complies with IEC 60950-1 (CB Certificate Available)

ENVIRONMENTAL RATING:

Maximum Operating Temperature: 50C / 122F

NOTES

- UNIT DIMENSIONS: 66.25in x 2.0in x 2.6in / 1683mm x 51mm x 66mm
- SHIPPED WEIGHT: 18lbs (8.16kg)
- SHIPPING DIMENSIONS: 72in x 9in x 7in / 1829mm x 223mm x 159mm
- Toolless Mounting Hardware 61.25in / 1556mm and 64.75in / 1645mm, and 7938 Vertical Mounting Bracket Kit

OUTPUT POWER

CIRCUIT	PHASE	RECEPTACLE TYPE	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER CIRCUIT
1	L1	21xC13, 3xC19	100-240	10/16	16

INPUT POWER

INPUT CORD	INPUT SOCKET	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
None	IEC 60320 C20	1N/PE, 2/PE	50/60	100-240	16	16

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1%
CURRENT	±1% - Input Current ±2% - Circuit/Breaker Current

		Allgemeintoleranzen General tolerances		Oberfläche Finish		Werkstoff / Material		Gewicht: Weight: -	
		-		-		-		-	
Dimensions in mm		Date		Name		Bezeichnung / Description Switched, Vertical, 16A, 230V, (21) U-Lock C13 / (3) U-Lock C19			
		22/10/18		SW					
		Checked		-					
Approved		-		-		Zeichnungs-Nr. / Drawing no. VP8959EU3			
-		-		-		Maßstab Scale 1:6			
-		-		-		Verwendet in / Used in -			
Rev.	Change	Date	Name			Blatt/Sheet 1/1			

Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.