


## SwitchAir 2U Network Switch Cooling

Effective cool air delivery for front of rack mounted multi RU switches Universal for side intake switch types.


Placing network switches in an enclosed rack is a preferred design but it can be a challenge to deal with the heat generated by the devices. Due to design constraints and equipment density, intake air is typically at the front of the switch chassis with heat exhaust out the rear side of the switch.

SwitchAir 2U ensures side intake switches are able to receive the required cool air from outside the rack. SwitchAir delivers air to the switch via the SwitchAir cold air curtain. SwitchAir 2U works with switches having side intake with multiple exhaust configurations.

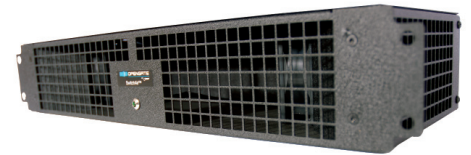

### SwitchAir 2U

A single SwitchAir cools switches with front air intake vents.

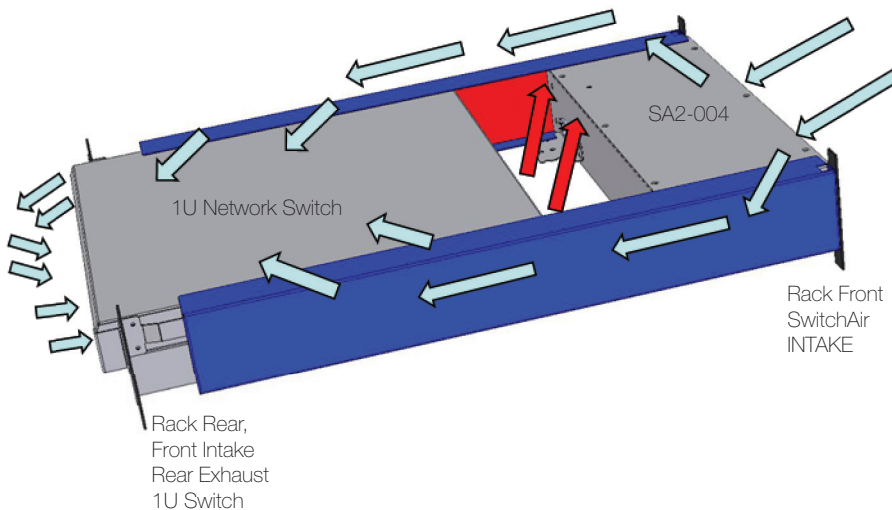

SA2-004 Specification	
Input Power / Indicator	90-264 VAC 50/60 Hz 15 watts LED Power Indicator
Input Connector	C14 Input
Airflow	94 CFM
Switch Intake / Exhaust	Front / Rear
Safety / Approvals	UL, cUL 60950, CE, FCC, Class A
Warranty	2 Years
Installation	Stackable in consecutive 2U spaces

To match your network switches to the relevant Geist Cool SwitchAir product take a look at our compatibility chart at [geistglobal.com](http://geistglobal.com)

10002603

#### Geist Americas

800.432.3219  
[geistglobal.com](http://geistglobal.com)

Geist DCIM  
1.877.449.4150  
[geistglobal.com](http://geistglobal.com)

#### Geist Europe

+44 (0) 1823 275100  
[geistglobal.com](http://geistglobal.com)

#### Geist Asia

China  
+86.755.86639505  
[geistglobal.com](http://geistglobal.com)

Hong Kong  
+852 90361927  
[geistglobal.com](http://geistglobal.com)